



SLOT - SL12

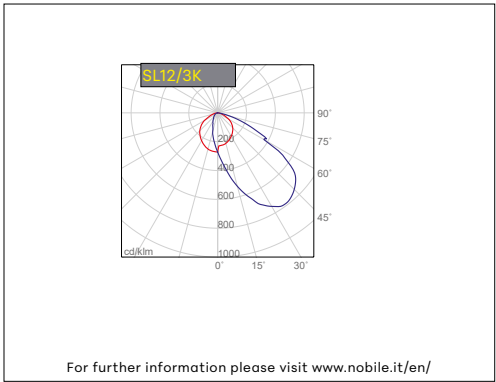

OUTDOOR WALL-RECESSED LUMINAIRE

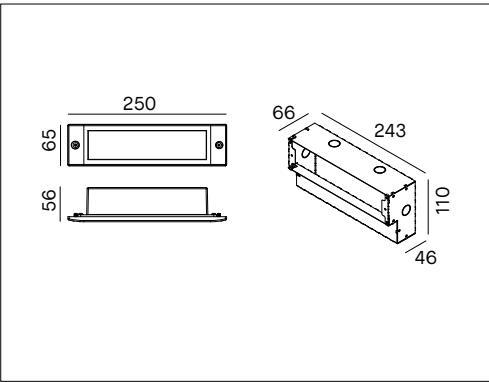

SPECIFICATION TEXT



Rectangular outdoor LED luminaire for wall-recessed installation (housing included). Asymmetric emission. Die-cast aluminium body painted white (RAL9003), grey (RAL9006) or anthracite (RAL7016). Satin-finished tempered glass. IK06. IP65. Reduced dimensions: frame 65x250mm, depth 56mm. Neoprene H05RN-F 3x0,75mm² cable of 500mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Outdoor wall-recessed luminaire			
	Installation type	Wall-recessed			
Dimension	Frame	65x250mm			
	Width	56mm			
Lamp	LED	Osram			
	System/W	12.5W			
	Luminous flux nominal	SL12/3K/_	1550lm	SL12/4K/_	1700lm
	Luminous flux real	SL12/3K/_	411lm	SL12/4K/_	451lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h			
	MacAdam	3			
Light	Light distribution	Asymmetric			
Material	Body	Die-cast aluminium			
	Colour	A= anthracite RAL7016 , G= grey RAL9006, W= white RAL9003			
	Diffuser	Satin finished tempered glass			
	Screws	Inox			
	Cable	Neoprene H05RN-F 3x0.75mm ² 500mm			
	Housing	Zinc-coated sheet, included			
IK	IK	06			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Conformità alle norme	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

SL12	/	*	*	/	*
		1			2
1	Colour temperature	3K = 3000K; 4K = 4000K.			
2	Colour	A= anthracite; G= grey; W= white.			