



SLIM - SM060R

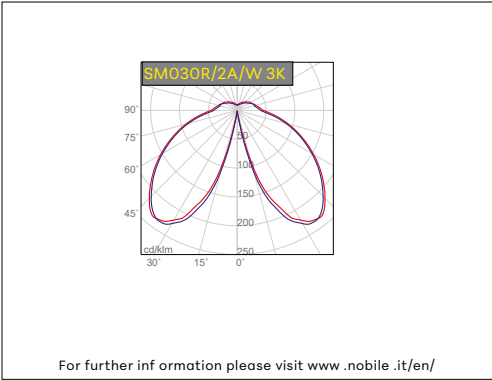

ROUND BOLLARD

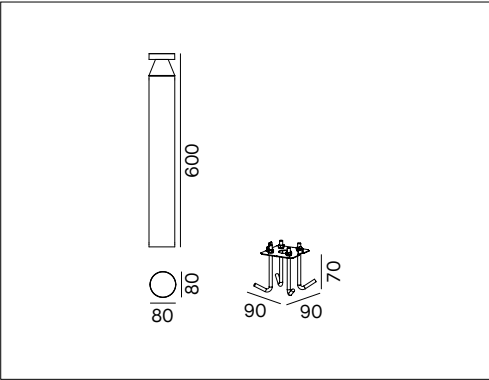

SPECIFICATION TEXT




Round LED bollard for floor installation. Indirect light emission, 360°. Body in aluminium painted white (RAL9003), grey (RAL9006), anthracite (RAL7016) or dark brown. Diffuser in diffusing glass. Anchoring system for ground installation included. IK08. IP65. Height 600mm. Diameter 80mm. 220-240V - 50/60Hz power supply. TRIAC dimmable. Integrated colour temperature selector 2700K-3000K-4000K.

Mounting	Product type	Bollard			
	Installation type	Floor, ground			
Dimension	Diameter	80mm			
	Height	600mm			
Lamp	LED	SAMSUNG			
	System/W	10.5W			
	Luminous flux real	2700K	3000K	4000K	
	(white colour)	SM060R/2A/_	1074lm	1132lm	1152lm
	Colour temperature CCT	2700K - 3000K - 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h L80B20 (Ta 25°)			
Light	MacAdam	3			
	Light distribution	Indirect 360°			
Material	Body	Die-cast aluminium			
	Colour	A= anthracite RAL7016 , G= grey RAL9006 , W= white RAL9003, BR= dark brown			
	Diffuser	Diffusing glass			
	Anchoring system	Stainless steel, included. COD. KIT/SM030			
	Connector	IP68 three pole connector, code: 5630, not included.			
IK	IK	08			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	5 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

SM060R	/	2A	/	*
1	Colour	A= anthracite; G= grey; W= white; BR= dark brown		

Accessories upon request to be ordered separately



KIT/SM030
Anchoring system for inground installation included.



5630
IP68 three pole connector (not included)