




SLOT PRO - SPS11

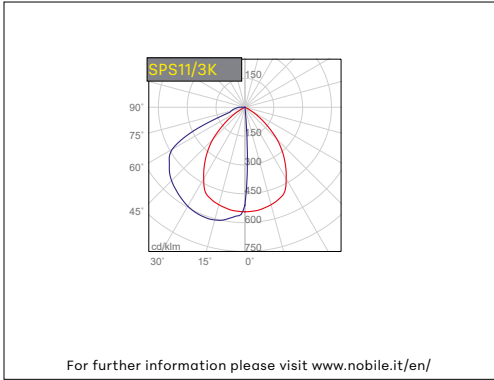

OUTDOOR WALL-MOUNTED LUMINAIRE

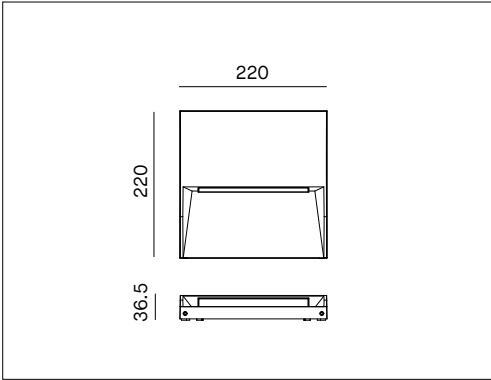

SPECIFICATION TEXT



Square outdoor LED luminaire for wall-mounted installation. Asymmetric emission. Die-cast aluminium body painted white (RAL9003), grey (RAL9006) or anthracite (RAL7016). PMMA diffuser. IK06. IP65. Reduced dimensions: frame 220x220mm, depth 36,5mm. Neoprene H05RN-F 3x0,75mm<sup>2</sup> cable of 500mm. 220-240V - 50/60Hz power supply included.

|            |                            |                                                                                           |        |            |        |
|------------|----------------------------|-------------------------------------------------------------------------------------------|--------|------------|--------|
| Mounting   | Product type               | Outdoor wall-mounted luminaire                                                            |        |            |        |
|            | Installation type          | Wall-mounted                                                                              |        |            |        |
| Dimension  | Frame                      | 220x220mm                                                                                 |        |            |        |
|            | Width                      | 36.5mm                                                                                    |        |            |        |
| Lamp       | LED                        | Osram                                                                                     |        |            |        |
|            | System/W                   | 11W                                                                                       |        |            |        |
|            | Luminous flux nominal      | SPS11/3K/_                                                                                | 1550lm | SPS11/4K/_ | 1700lm |
|            | Luminous flux real         | SPS11/3K/_                                                                                | 1068lm | SPS11/4K/_ | 1171lm |
|            | Colour temperature CCT     | 3000K, 4000K                                                                              |        |            |        |
|            | Colour rendering index CRI | >80                                                                                       |        |            |        |
|            | LED Lifetime               | 50.000 h                                                                                  |        |            |        |
|            | MacAdam                    | 3                                                                                         |        |            |        |
| Light      | Light distribution         | Asymmetric                                                                                |        |            |        |
| Material   | Body                       | Die-cast aluminium                                                                        |        |            |        |
|            | Colour                     | A= anthracite RAL7016 , G= grey RAL9006, W= white RAL9003                                 |        |            |        |
|            | Diffuser                   | PMMA                                                                                      |        |            |        |
|            | Screws                     | Inox                                                                                      |        |            |        |
|            | Cable                      | Neoprene H05RN-F 3x0.75mm <sup>2</sup> 500mm                                              |        |            |        |
| IK         | IK                         | 06                                                                                        |        |            |        |
| Electrical | Operating voltage          | 220-240V 50-60Hz power supply included                                                    |        |            |        |
| Warranty   | Warranty                   | 3 years                                                                                   |        |            |        |
| Norms      | Norm compliance            | EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015 |        |            |        |

CODE CONFIGURATION

|       |                    |                                   |   |   |   |
|-------|--------------------|-----------------------------------|---|---|---|
| SPS11 | /                  | *                                 | * | / | * |
|       |                    | 1                                 |   |   | 2 |
| 1     | Colour temperature | 3K = 3000K; 4K = 4000K.           |   |   |   |
| 2     | Colour             | A= anthracite; G= grey; W= white. |   |   |   |

SPS11



SP/KIT/503

Kit with fixing plate and 6 screws. (box not included)

ACCESSORIES UPON REQUEST