

WAY35

ANGULAR MONO-EMISSION OPAL

H (m)	D (m)	E _{max} (lx)	E _{av} (lx)
1.0	3.0	663	157
2.0	6.1	166	39
3.0	9.2	74	17

For further information please visit www.nobile.it/en/

MADE IN ITALY

IP40

CE

RoHS

ERP COMPLIANCE

SPECIFICATION TEXT

Angular mono-emission LED luminaire (dimensions 35x55mm). Dimension 515x525mm. Easy installation with accessories not included. Monoemission with opal diffuser to be ordered separately. Luxeon LED SMD 3014 CRI>90, high visual comfort. Lifetime 70.000h (L80B20). Body in white or matt black painted extruded aluminium, end caps in white or matt black painted aluminium not included. IP40. Power supply included, PUSH or DALI dimmable version available. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Mono-emission opal	
	Installation type	Mono-emission	
Dimension	Body	515x525mm	
	Height	55mm	
	Depth	35mm	
Lamp	LED	Luxeon 3014	
	System/W	24W	
	Luminous flux nominal	W35/A1A/3K/_	3500lm
		W35/A1A/4K/_	3800lm
	Luminous flux real with opal diffuser (S)	3000K	4000K
		W35/05/S	1870lm 1938lm
	Colour temperature CCT	3000K, 4000K	
	Colour rendering index CRI	>90	
	LED Lifetime	70.000 h L80B20 (Ta25°)	
	Photobiological risk	RG0	
	UGR	<28	
Light	Light distribution	Mono-emission	
	Light beam	120°	
Material	Body	Alluminio estruso	
	End cap	Alluminio, non inclusi	
	Colour	Bianco W (RAL9010) o nero opaco B (RAL9005)	
	Diffuser	Policarbonato opale	
Electrical	Driver	ON-OFF 220-240V 50-60Hz incluso	
Warranty	Warranty	5 anni	
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015	

CONFIGURAZIONE CODICE

W35	/	*	*	*	/	*	/	*	*
		1		2		3		4	5
1	Lunghezza prodotto	A1 = angolare							
2	Distribuzione della luce	A = mono-emissione; B = bi-emissione							
3	Temperatura di colore	3K = 3000K; 4K = 4000K.							
4	Colore corpo	B = nero opaco; W = bianco.							
5	Alimentatore	2 = PUSH (DIM 1-10V on request); 3 = DALI.							
2 = Max 4 dispositivi su pulsante N.A									

Accessori necessari, da ordinare separatamente

W35/001/_	Kit tappi (2pz)	W35/004	Giunto lineare	W35/008/_	Giunto angolare cieco
-----------	-----------------	---------	----------------	-----------	-----------------------

* W Bianco * B Nero

Modulo cieco ordinabile su richiesta

Kit installazione, da ordinare separatamente

W35/002/CLIP	Kit plafone (2pz)	W35/003R/_*	Rosone aliment. 3 poli per versioni ON-OFF
W35/003/SOSP	Kit sospensione 3m (2pz)	W35/003R/DALI/_*	Rosone aliment. 5 poli PUSH e DALI
W35/003I	Kit sospensione intermedia 3m per fila continua	W35/006	Kit incasso trimless (2pz)

Nobile Italia S.p.A.


Viale Alexandre Gustave Eiffel, 100 Commerc City Isola P.21-24 - 00148 Roma, Italia - Tel. +39 06 65002524 - info@nobile.it

Export Sales Department: Via Lavoratori Autobianchi, 1 20832 Desio (MB), Italia - Tel. +39 0362 1790030 - export.dpt@nobile.it

Rev.01 03/2025


p.01

WAY35




W35/001/W W35/001/B

White or black painted aluminium end cap kit (2pcs)




W35/002/CLIP

Ceiling installation kit consisting of 2 ceiling fixing clips (dowels and screws not included).

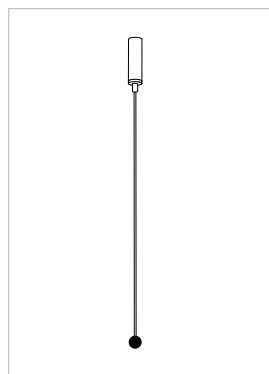

W35/003I

Intermediate suspended lighting kit consisting of rose ceiling featuring micro adjustment and L3000 steel cable (1pc). Particular attention should go to the various joints placed between the different extruders and the angled elements

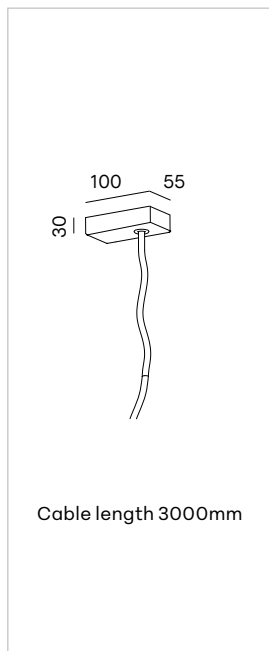

W35/003R/W W35/003R/B

White or black 3-pole rose ceiling with power supply kit for on-off drivers.

W35/003R/DALI/W

W35/003R/DALI/B

White or black 5-pole rose ceiling with power supply kit for PUSH and DALI drivers.


W35/003R/DALI/WE

W35/003R/DALI/BE

White or black 5+2-pole rose ceiling with power supply kit for PUSH and DALI drivers, in emergency version.


Cable length 3000mm

ACCESSORIES AVAILABLE UPON REQUEST




W35/003/SOSP

Suspended lighting kits consisting of rose ceiling featuring micro adjustment and L3000mm steel cable (2pcs).




W35/004

Linear joint (1pc)



W35/006

Trimless bracket kit (2pcs).



W35/008/W W35/008/B

White or black aluminium blind angled joint (1pc)



* W White * B Black