



WAY35



LINEAR BI-EMISSION MICRO-PRISMATIC

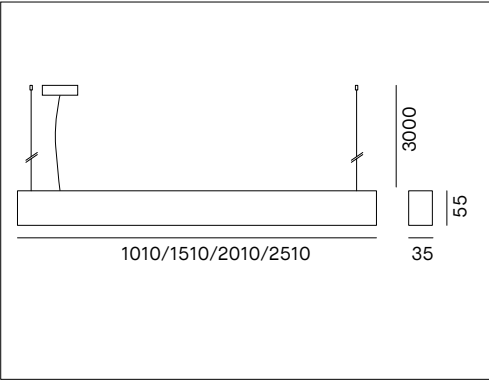

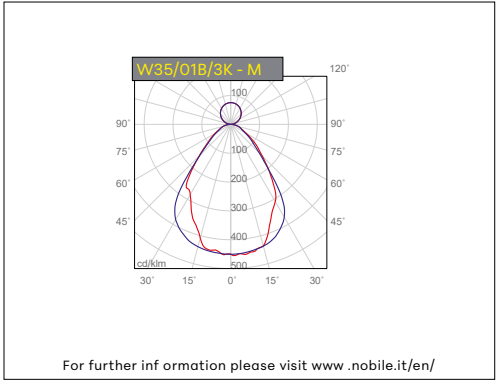


SPECIFICATION TEXT


Linear bi-emission LED luminaire (dimensions 35x55mm). Modular lengths from 1000mm up to 2500mm. Easy installation with accessories not included. Bi-emission with opal upper diffuser included and micro-prismatic diffuser for down emission to be ordered separately. Luxeon LED SMD 3014 CRI>90, high visual comfort. Lifetime 70.000h (L80B20). Body in white or matt black painted extruded aluminium, end caps in white or matt black painted aluminium not included. IP40. Power supply included, PUSH or DALI dimmable version available. Single power. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Bi-emission micro-prismatic + opal															
	Installation type	Bi-emission															
Dimension	Length	1010-1510-2010-2510mm															
	Height	55mm															
	Depth	35mm															
Lamp	LED	Luxeon 3014															
	System/W	30-45-60-72W															
	Luminous flux nominal	1000mm				1500mm				2000mm				2500mm			
		UP		DOWN		UP		DOWN		UP		DOWN		UP		DOWN	
		W35/01B/3K/_		1150lm	3500lm	W35/02B/3K/_		1750lm	5300lm	W35/03B/3K/_		2350lm	7050lm	W35/04B/3K/_		2950lm	8800lm
		W35/01B/4K/_		1250lm	3800lm	W35/02B/4K/_		1900lm	5700lm	W35/03B/4K/_		2550lm	7600lm	W35/04B/4K/_		3200lm	9500lm
		3000K				4000K											
		UP		DOWN		UP		DOWN									
		W35/01/M		628lm	2234lm	683lm		2307lm									
		W35/02/M		942lm	3351lm	1025lm		3461lm									
		W35/03/M		1256lm	4468lm	1366lm		4614lm									
		W35/04/M		1570lm	5585lm	1708lm		5768lm									
		Colour temperature CCT	3000K, 4000K														
		Colour rendering index CRI	>90														
		LED Lifetime	70.000 h L80B20 (Ta25°)														
	Photobiological risk	RG0															
	UGR	<19															
Light	Light distribution	Bi-emission															
Material	Body	Extruded aluminium															
	End cap	Aluminium, not included															
	Colour	White W (RAL9010) or black matt B (RAL9005)															
	Diffuser	Polycarbonate micro-prismatic (upper opal diffuser included)															
Electrical	Driver	ON-OFF 220-240V 50-60Hz included															
Warranty	Warranty	5 years															
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015															


WAY35

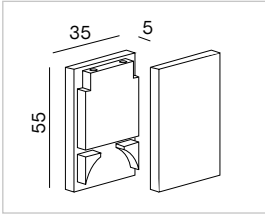


W35/001/W W35/001/B
White or black painted aluminium end cap kit (2pcs)

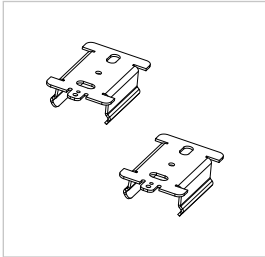

W35/002/CLIP
Ceiling installation kit consisting of 2 ceiling fixing clips (dowels and screws not included).

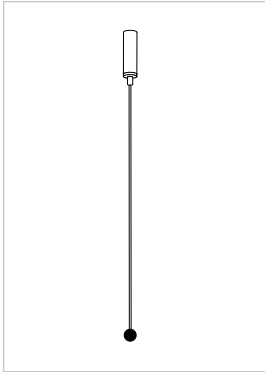

W35/003I
Intermediate suspended lighting kit consisting of rose ceiling featuring micro adjustment and L3000 steel cable (1pc). Particular attention should go to the various joints placed between the different extruders and the angled elements

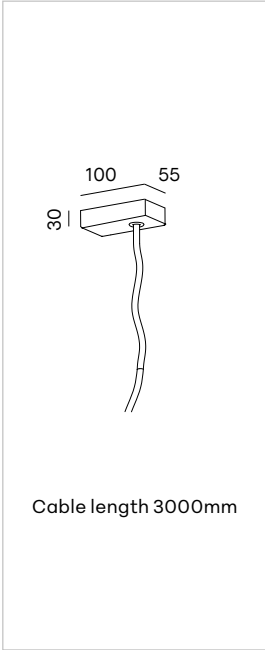


W35/003R/W W35/003R/B
White or black 3-pole rose ceiling with power supply kit for on-off drivers.


W35/003R/DALI/W
W35/003R/DALI/B
White or black 5-pole rose ceiling with power supply kit for PUSH and DALI drivers.

W35/003R/DALI/WE
W35/003R/DALI/BE
White or black 5+2-pole rose ceiling with power supply kit for PUSH and DALI drivers, in emergency version.


ACCESSORIES AVAILABLE UPON REQUEST

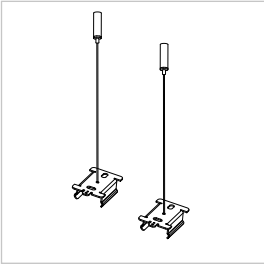


W35/003/SOSP
Suspended lighting kits consisting of rose ceiling featuring micro adjustment and L3000mm steel cable (2pcs).

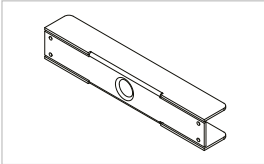

W35/004
Linear joint (1pc)

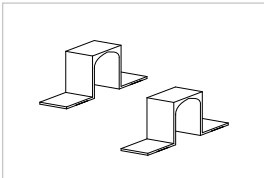


W35/006
Trimless bracket kit (2pcs).

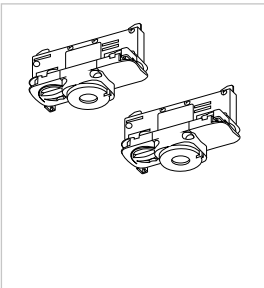

W35/007/W W35/007/B
White or black track kit (2pcs), ON-OFF.

W35/007/DALI/W
W35/007/DALI/B
White or black track kit (2pcs), DALI.

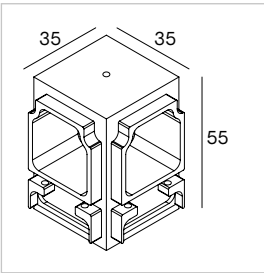

W35/008/W W35/008/B
White or black aluminium blind angled joint (1pc)



* W White * B Black