



WAY35



LINEAR BI-EMISSION OPAL

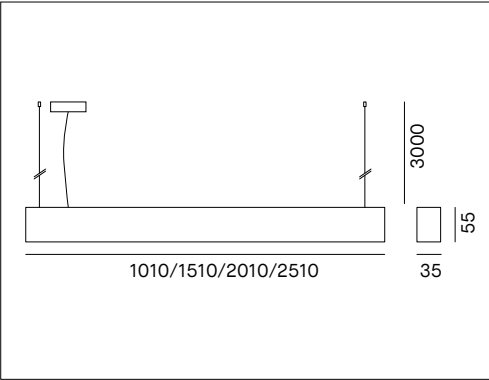

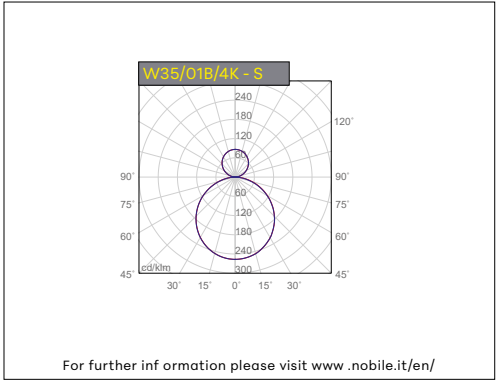

SPECIFICATION TEXT

Linear bi-emission LED luminaire (dimensions 35x55mm). Modular lengths from 1000mm up to 2500mm. Easy installation with accessories not included. Bi-emission with opal upper diffuser included and opal diffuser for down emission to be ordered separately. Luxeon LED SMD 3014 CRI>90, high visual comfort. Lifetime 70.000h (L80B20). Body in white or matt black painted extruded aluminium, end caps in white or matt black painted aluminium not included. IP40. Power supply included, PUSH or DALI dimmable version available. Single power. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Bi-emission opal											
	Installation type	Bi-emission											
Dimension	Length	1010-1510-2010-2510mm											
	Height	55mm											
	Depth	35mm											
Lamp	LED	Luxeon 3014											
	System/W	30-45-60-72W											
	Luminous flux nominal	1000mm				1500mm				2000mm			
		UP	DOWN			UP	DOWN			UP	DOWN		
		W35/01B/3K/_	1150lm	3500lm	W35/02B/3K/_	1750lm	5300lm	W35/03B/3K/_	2350lm	7050lm	W35/04B/3K/_	2950lm	8800lm
		W35/01B/4K/_	1250lm	3800lm	W35/02B/4K/_	1900lm	5700lm	W35/03B/4K/_	2550lm	7600lm	W35/04B/4K/_	3200lm	9500lm
	Luminous flux real with opal diffuser (S) UP/DOWN	3000K				4000K							
		UP	DOWN	UP	DOWN								
		W35/01/S	628lm	1870lm	683lm	1938lm							
		W35/02/S	942lm	2805lm	1025lm	2907lm							
		W35/03/S	1256lm	3740lm	1366lm	3876lm							
		W35/04/S	1570lm	4675lm	1708lm	4845lm							
	Colour temperature CCT	3000K, 4000K											
	Colour rendering index CRI	>90											
	LED Lifetime	70.000 h L80B20 (Ta25°)											
	Photobiological risk	RG0											
	UGR	<28											
Light	Light distribution	Bi-emission											
Material	Body	Extruded aluminium											
	End cap	Aluminium, not included											
	Colour	White W (RAL9010) or black matt B (RAL9005)											
	Diffuser	Polycarbonate opal											
Electrical	Driver	ON-OFF 220-240V 50-60Hz included											
Warranty	Warranty	5 years											
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015											

CODE CONFIGURATION


W35	/	*	*	*	/	*	/	*	*
		1		2		3		4	5
1	Produit length	01 = 1000mm; 02 = 1500mm; 03 = 2000mm; 04 = 2500mm							
2	Light distribution	A = mono-emission; B = bi-emission							
3	Colour temperature	3K = 3000K; 4K = 4000K.							
4	Body colour	B = black matt; W = white.							
5	Driver	2 = PUSH (DIM 1-10V on request); 3 = DALI.							
2 = Max 4 devices PUSH button									

Necessary accessories, to be ordered separately			
W35/001/_	Kit end caps (2pz)	W35/004	Linear joint
		W35/008/_	Blind angled joint


* W White * B Black
Blind module on request

Installation kit, to be ordered separately			
W35/003/SOSP	Suspension kit 3m (2pcs)	W35/003R/_*	Rose ceiling power supply 3-pole for ON-OFF version
W35/003I	Intermediate 3m suspended installation kit for continuous line	W35/003R/DALI/_*	Rose ceiling power supply 5-pole PUSH and DALI


WAY35




W35/001/W W35/001/B
White or black painted aluminium end cap kit (2pcs)



W35/002/CLIP
Ceiling installation kit consisting of 2 ceiling fixing clips (dowels and screws not included).

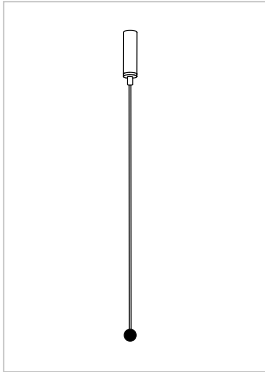

W35/003I
Intermediate suspended lighting kit consisting of rose ceiling featuring micro adjustment and L3000 steel cable (1pc). Particular attention should go to the various joints placed between the different extruders and the angled elements

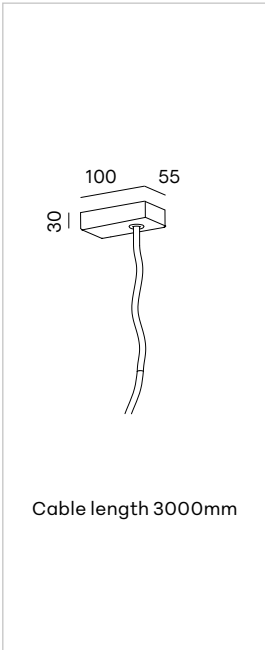


W35/003R/W W35/003R/B
White or black 3-pole rose ceiling with power supply kit for on-off drivers.


W35/003R/DALI/W
W35/003R/DALI/B
White or black 5-pole rose ceiling with power supply kit for PUSH and DALI drivers.

W35/003R/DALI/WE
W35/003R/DALI/BE
White or black 5+2-pole rose ceiling with power supply kit for PUSH and DALI drivers, in emergency version.


ACCESSORIES AVAILABLE UPON REQUEST




W35/003/SOSP
Suspended lighting kits consisting of rose ceiling featuring micro adjustment and L3000mm steel cable (2pcs).



W35/004
Linear joint (1pc)




W35/006
Trimless bracket kit (2pcs).



W35/007/W W35/007/B
White or black track kit (2pcs), ON-OFF.

W35/007/DALI/W
W35/007/DALI/B
White or black track kit (2pcs), DALI.



W35/008/W W35/008/B
White or black aluminium blind angled joint (1pc)



* W White * B Black