



WAY35



LINEAR MONO-EMISSION MICRO-PRISMATIC

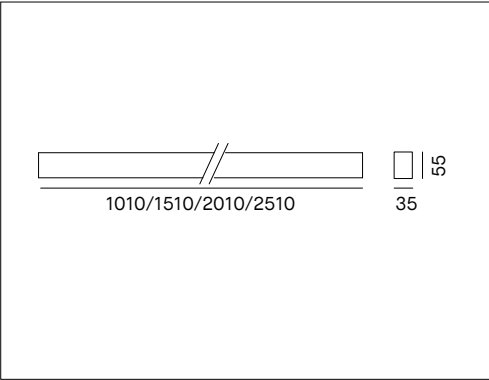

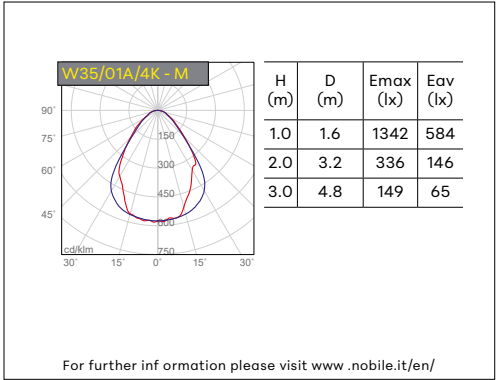

SPECIFICATION TEXT

Linear mono-emission LED luminaire (dimensions 35x55mm). Modular lengths from 1000mm up to 2500mm. Easy installation with accessories not included. Monoemission with micro-prismatic diffuser to be ordered separately. Luxeon LED SMD 3014 CRI>90, high visual comfort. Lifetime 70.000h (L80B20). Body in white or matt black painted extruded aluminium, end caps in white or matt black painted aluminium not included. IP40. Power supply included, PUSH or DALI dimmable version available. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).


Mounting	Product type	Mono-emissione microprismatico							
	Installation type	Mono-emissione							
Dimension	Length	1010-1510-2010-2510mm							
	Height	55mm							
	Depth	35mm							
Lamp	LED	Luxeon 3014							
	System/W	24-36-47-60W							
	Luminous flux nominal		1000mm		1500mm		2000mm		2500mm
		W35/01A/3K/_	3500lm	W35/02A/3K/_	5300lm	W35/03A/3K/_	7050lm	W35/04A/3K/_	8800lm
		W35/01A/4K/_	3800lm	W35/02A/4K/_	5700lm	W35/03A/4K/_	7600lm	W35/04A/4K/_	9500lm
	Luminous flux real with micro-prismatic diffuser (M)		3000K	4000K					
		W35/01/M	2234lm	2307lm					
		W35/02/M	3351lm	3461lm					
		W35/03/M	4468lm	4614lm					
		W35/04/M	5585lm	5768lm					
	Colour temperature CCT	3000K, 4000K							
	Colour rendering index CRI	>90							
	LED Lifetime	70.000 h L80B20 (Ta25°)							
	Photobiological risk	RG0							
	UGR	<19							
Light	Light distribution	Mono-emission							
	Light beam	80°							
Material	Body	Extruded aluminium							
	End cap	Aluminium, not included							
	Colour	White W (RAL9010) or black matt B (RAL9005)							
	Diffuser	Polycarbonate micro-prismatic							
Electrical	Driver	ON-OFF 220-240V 50-60Hz included							
Warranty	Warranty	5 years							
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015							

CODE CONFIGURATION


W35	/	*	*	*	/	*	/	*	*
		1	2	3		4		5	
1	Produit length	01 = 1000mm; 02 = 1500mm; 03 = 2000mm; 04 = 2500mm							
2	Light distribution	A = mono-emission; B = bi-emission							
3	Colour temperature	3K = 3000K; 4K = 4000K.							
4	Body colour	B = black matt; W = white.							
5	Driver	2 = PUSH (DIM 1-10V on request); 3 = DALI.							
2 = Max 4 devices PUSH button									

Necessary accessories, to be ordered separately				* W White * B Black	
W35/001/_	Kit end caps (2pz)	W35/004	Linear joint	W35/008/_	Blind angled joint
Blind module on request					
Installation kit, to be ordered separately					
W35/002/CLIP	Ceiling kit (2pcs)	W35/003R/_*	Rose ceiling power supply 3-pole for ON-OFF version	W35/007/_	Track kit (2pcs)
W35/003/SOSP	Suspension kit 3m (2pcs)	W35/003R/DALI/_*	Rose ceiling power supply 5-pole PUSH and DALI	W35/007/DALI/_	Track kit (2pcs) DALI
W35/003I	Intermediate 3m suspended installation kit for continuous line	W35/006	Recessed trimless kit (2pcs)		


WAY35




W35/001/W W35/001/B
White or black painted aluminium end cap kit (2pcs)



W35/002/CLIP
Ceiling installation kit consisting of 2 ceiling fixing clips (dowels and screws not included).

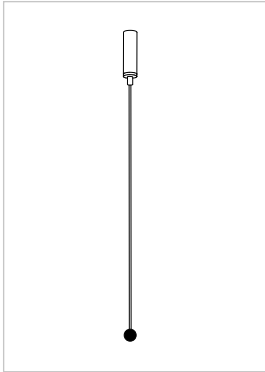

W35/003I
Intermediate suspended lighting kit consisting of rose ceiling featuring micro adjustment and L3000 steel cable (1pc). Particular attention should go to the various joints placed between the different extruders and the angled elements

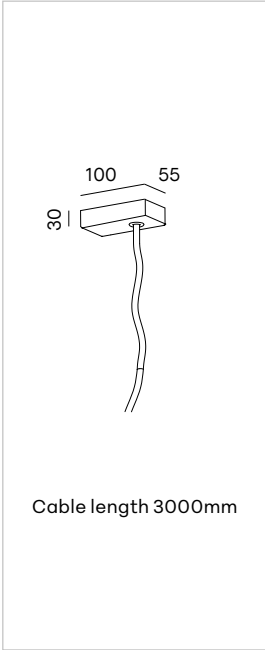


W35/003R/W W35/003R/B
White or black 3-pole rose ceiling with power supply kit for on-off drivers.


W35/003R/DALI/W
W35/003R/DALI/B
White or black 5-pole rose ceiling with power supply kit for PUSH and DALI drivers.

W35/003R/DALI/WE
W35/003R/DALI/BE
White or black 5+2-pole rose ceiling with power supply kit for PUSH and DALI drivers, in emergency version.


ACCESSORIES AVAILABLE UPON REQUEST




W35/003/SOSP
Suspended lighting kits consisting of rose ceiling featuring micro adjustment and L3000mm steel cable (2pcs).



W35/004
Linear joint (1pc)




W35/006
Trimless bracket kit (2pcs).



W35/007/W W35/007/B
White or black track kit (2pcs), ON-OFF.

W35/007/DALI/W
W35/007/DALI/B
White or black track kit (2pcs), DALI.



W35/008/W W35/008/B
White or black aluminium blind angled joint (1pc)



* W White * B Black