

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 Aspect LED round (AASWOLED)

1.1.1 Data sheet

AASWOLED **Aspect LED round**


Luminaire data

Absolute Photometry
Luminaire efficacy : 68.86 lm/W
Classification : A70 ↓100.0% ↑0.0%
CIE Flux Codes : 92 99 100 100 100
UGR 4H 8H : 13.2 / 13.1
Power : 7 W
Luminous flux : 482 lm

Equipped with

Quantity : 1
Designation : LED
Colour :


Dimensions : Ø116 mm x 1 mm

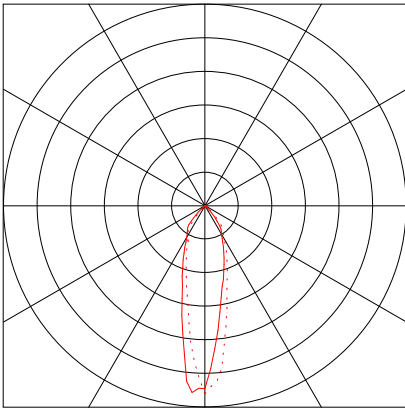

Object :
 Installation :
 Project number :
 Date :

1.1 Aspect LED round (AASWOLED)

1.1.2 LDC

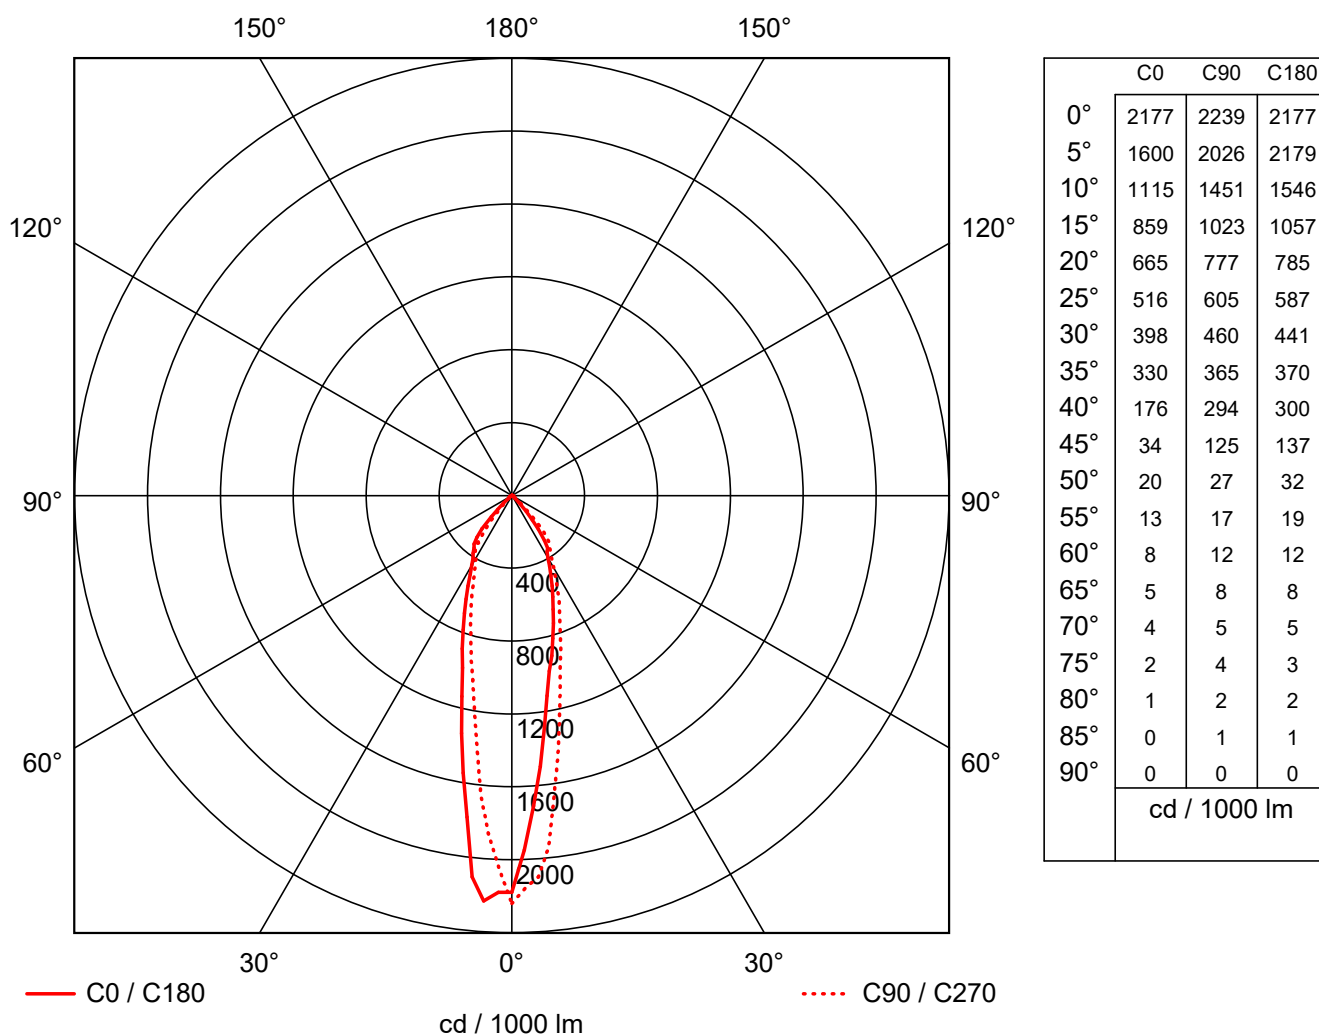

Manufacturer	:	Luminaire efficacy	: 68.86 lm/W (A70)
Order number	:	Light distribution	: asymmetric
Luminaire name	:	Beam Angle	: 9.9° C0
Equipment	:		: 13.8° C90
Dimensions	:		: 14.3° C180
File name	:		: 11.1° C270

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.2 ANSELL LIGHTING, Beam AC LED (ABEAMLED)

1.2.1 Data sheet

Manufacturer: ANSELL LIGHTING

ABEAMLED **Beam AC LED**


Luminaire data

Luminaire efficiency : 68.08%
Luminaire efficacy : 81.19 lm/W
Classification : A60 ↓100.0% ↑0.0%
CIE Flux Codes : 89 98 99 100 68
UGR 4H 8H : 17.5 / 17.5
Power : 20 W
Luminous flux : 1623.7 lm

Dimensions : Ø200 mm x 200 mm

Equipped with


Quantity : 1
Designation : LED 20W
Colour : 4000
Luminous flux : 2385 lm
Colour reproduction : 80

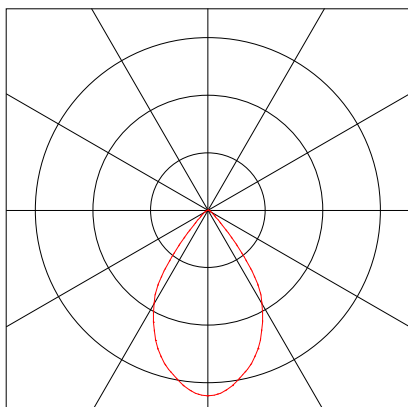

Object :
 Installation :
 Project number :
 Date :

1.2 ANSELL LIGHTING, Beam AC LED (ABEAMLED)

1.2.2 LDC

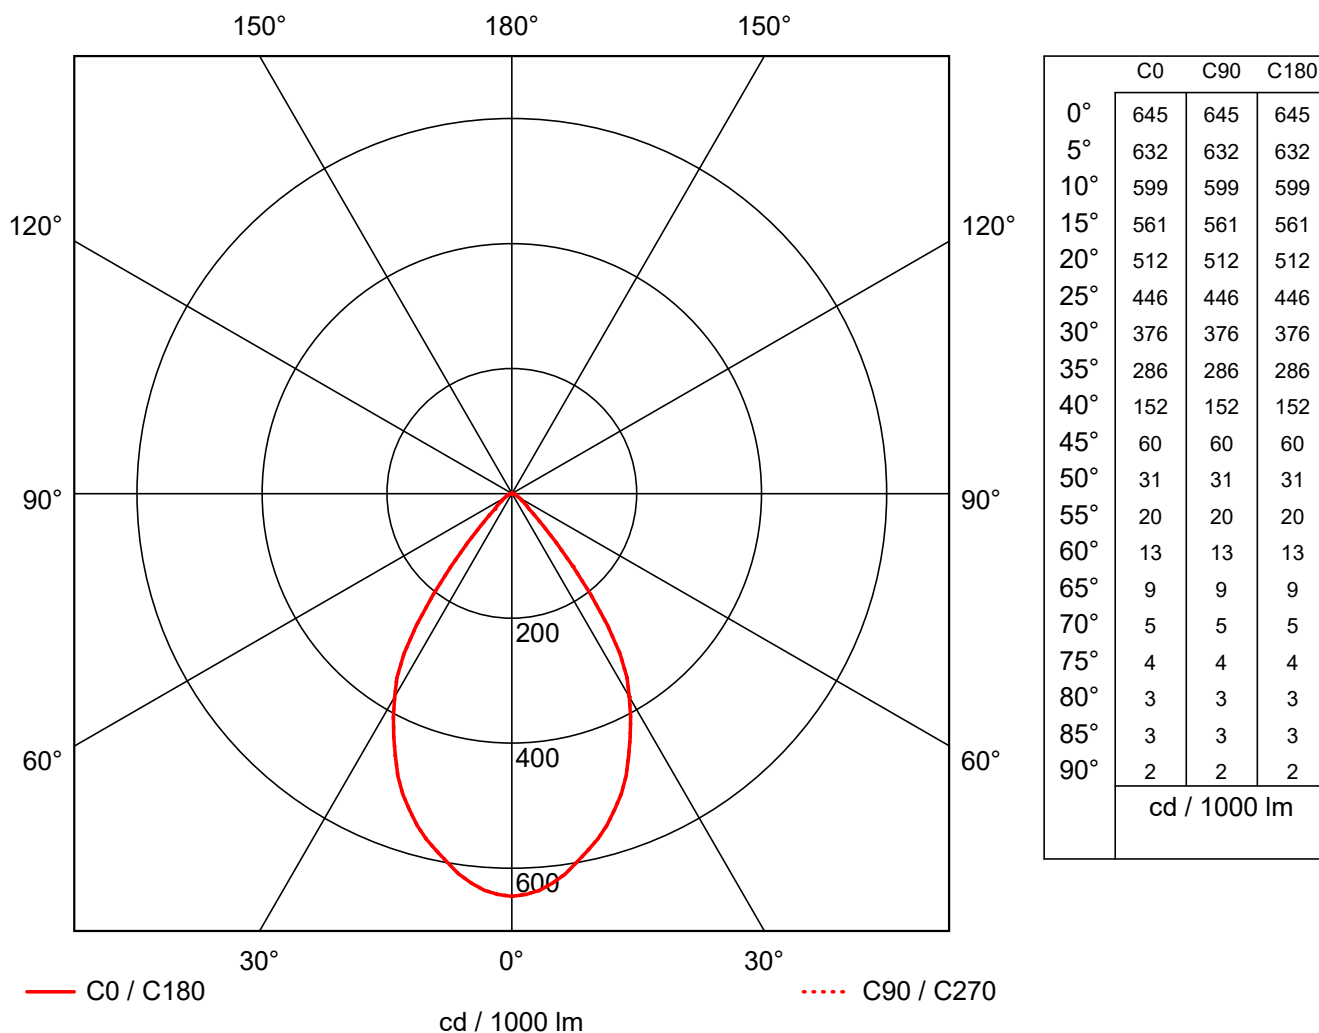

Manufacturer : ANSELL LIGHTING
 Order number : ABEAMLED
 Luminaire name : Beam AC LED
 Equipment : 1 x LED 20W 20 W / 2385 lm
 Dimensions : D 200 mm x H 200 mm
 File name : ABEAMLED.LDT

Efficiency factor : 68.08%
 Luminaire efficacy : 81.19 lm/W (A60)
 Light distribution
 Beam Angle : 33.3° C0
 33.3° C90
 33.3° C180
 33.3° C270

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.3 ANSELL Lighting, Beta LED IP44 bulkhead (ABELED/WV)

1.3.1 Data sheet

Manufacturer: ANSELL Lighting

ABELED/WV Beta LED IP44 bulkhead


Luminaire data

Luminaire efficiency : 58.1%
Luminaire efficacy : 87.15 lm/W
Classification : A41 ↓92.9% ↑7.1%
CIE Flux Codes : 44 74 92 93 58
UGR 4H 8H : 22.3 / 21.8
Power : 5 W
Luminous flux : 435.8 lm

Equipped with

Quantity : 1
Designation : LED
Colour :
Luminous flux : 750 lm


Dimensions : Ø160 mm x 70 mm

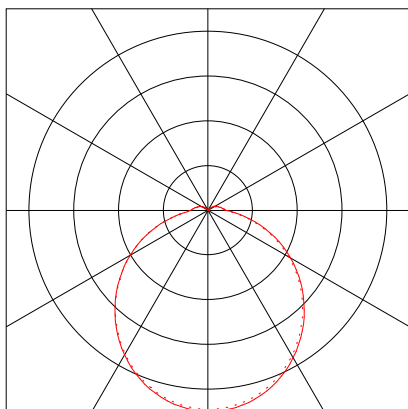

Object :
 Installation :
 Project number :
 Date :

1.3 ANSELL Lighting, Beta LED IP44 bulkhead (ABELED/WV)

1.3.2 LDC

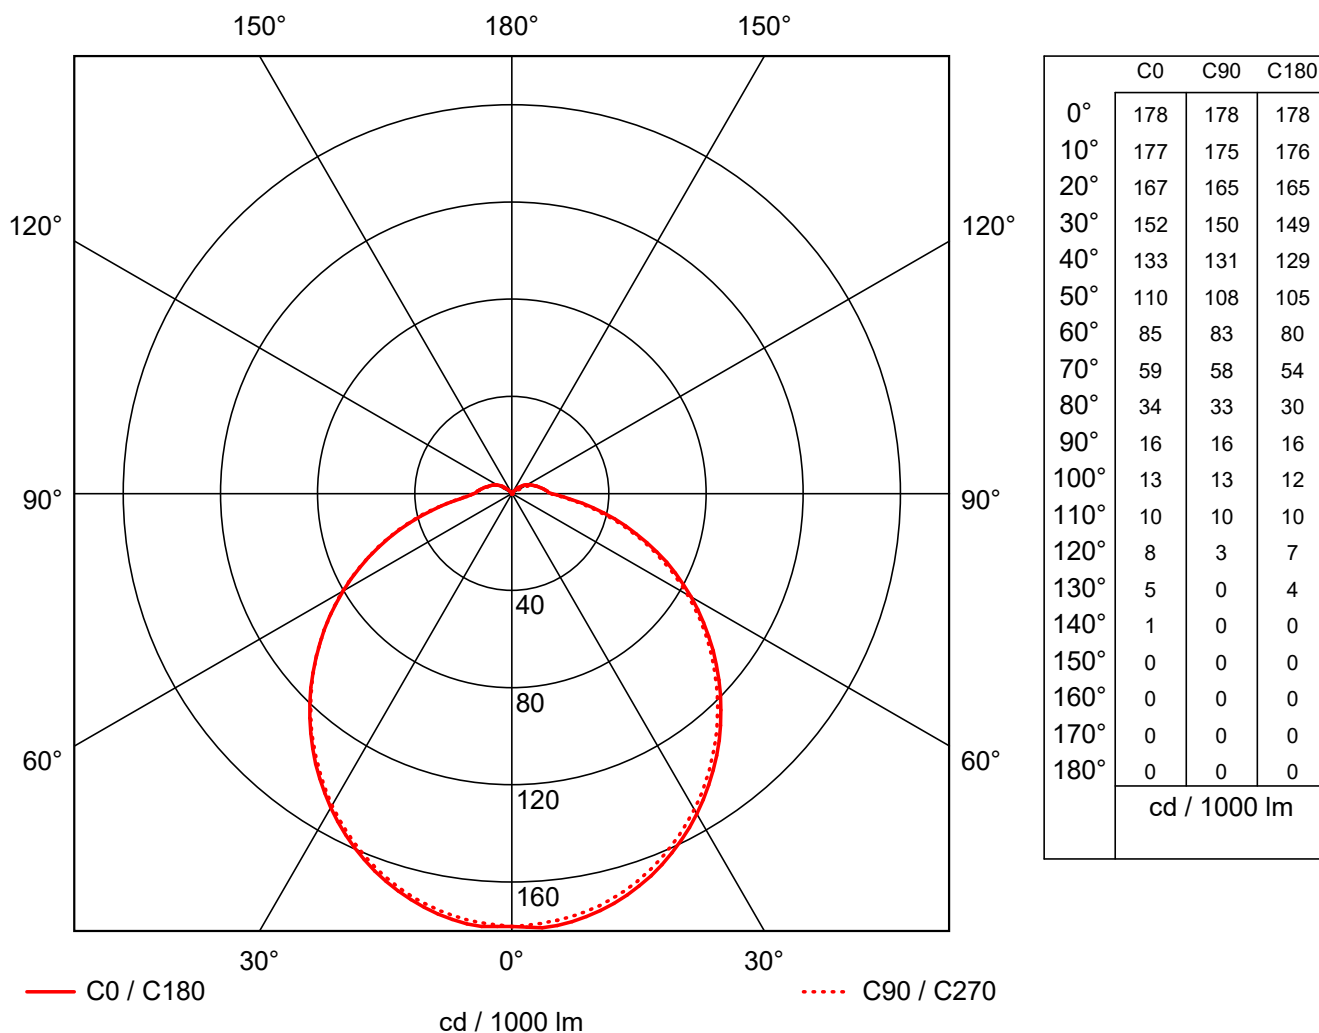

Manufacturer : ANSELL Lighting
 Order number : ABELED/WV
 Luminaire name : Beta LED IP44 bulkhead
 Equipment : 1 x LED 5 W / 750 lm
 Dimensions : D 160 mm x H 70 mm
 File name : rlx_20170825220322.ltd
 Efficiency factor : 58.1%
 Luminaire efficacy : 87.15 lm/W (A41)
 Light distribution
 Beam Angle : 58.3° C0
 57.6° C90
 56.4° C180
 56.4° C270