

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 ANSELL Lighting, Camini LED (ACSQLEDWL)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ACSQLEDWL Camini LED


Luminaire data

Luminaire efficiency : 37.8328%
Luminaire efficacy : 21.93 lm/W
Classification : A30 ↓100.0% ↑0.0%
CIE Flux Codes : 29 70 98 100 38
UGR 4H 8H : 19.0 / <10.0
Power : 3.6 W
Luminous flux : 79 lm

Dimensions : 63 mm x 34 mm x 25 mm

Equipped with


Quantity : 1
Designation : OSRAM LCW
CR7P EC
700mA
Colour :
Luminous flux : 208.7 lm
Colour reproduction : 1 B

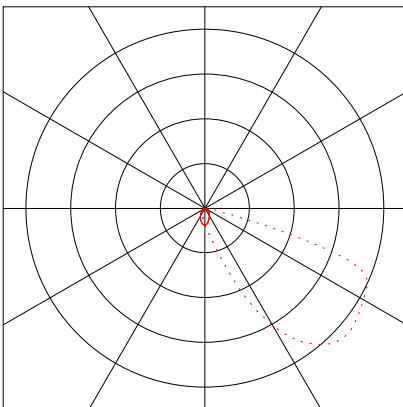

Object :
 Installation :
 Project number :
 Date :

1.1 ANSELL Lighting, Camini LED (ACSQLEDWL)

1.1.2 LDC

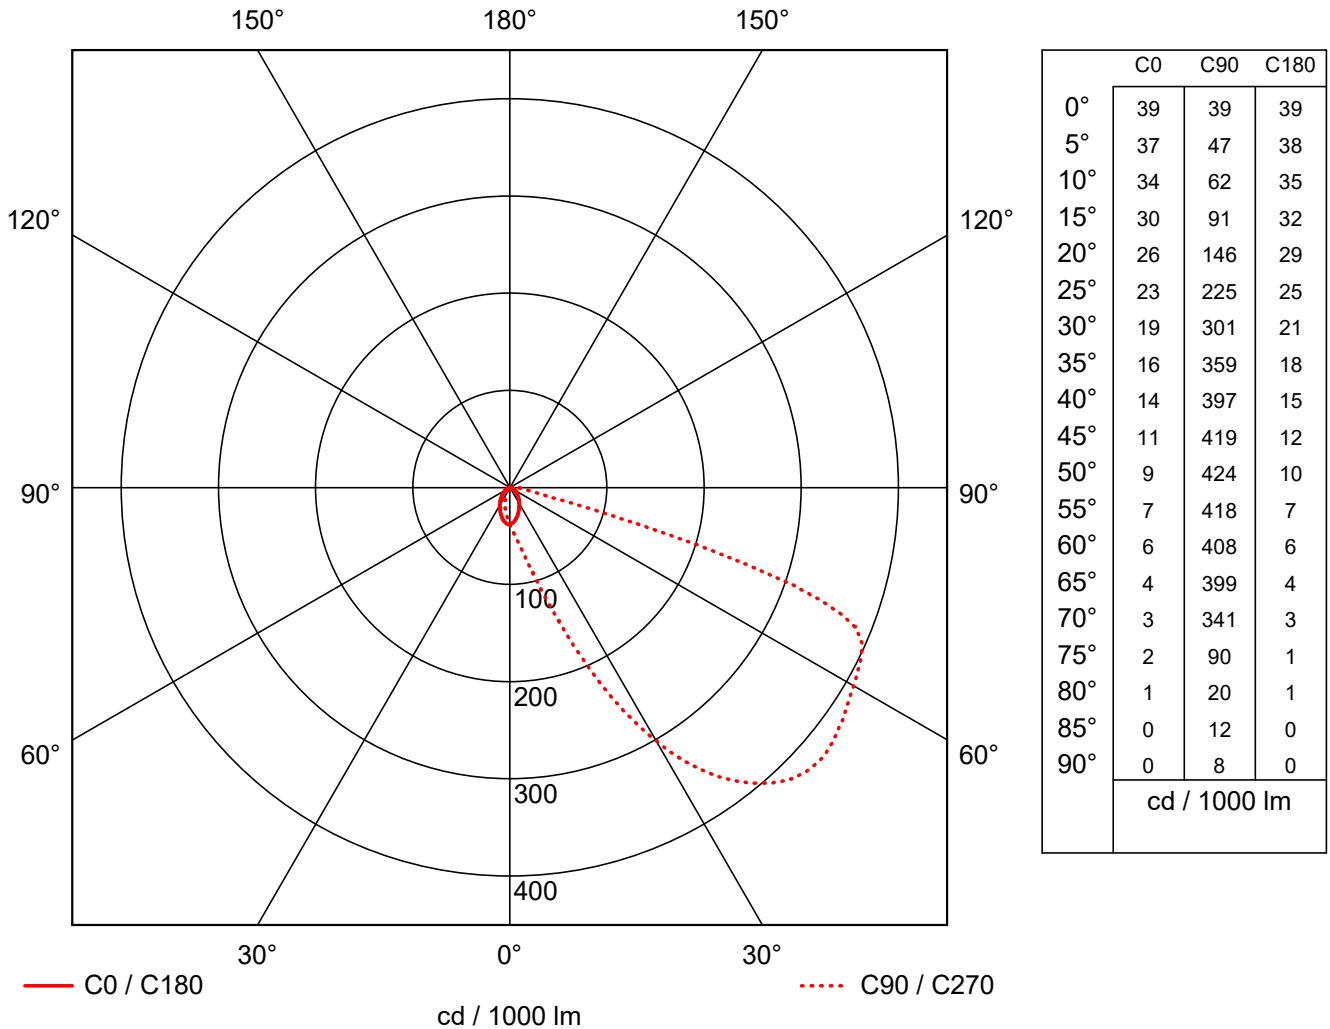

Manufacturer	: ANSELL Lighting	Efficiency factor	: 37.83%
Order number	: ACSQLEDWL	Luminaire efficacy	: 21.93 lm/W (A30)
Luminaire name	: Camini LED	Light distribution	
Equipment	: 1 x OSRAM LCW CR7P EC 700mA	Beam Angle	: -- C0
Dimensions	: L 63 mm x W 34 mm x H 25 mm		: 72.8° C90
File name	: ACSQLEDWL.LDT		: -- C180
			: -- C270