



1 Luminaire data

1.1 ANSELL, COMMERCIAL - Endurance LE... (AERMLED3/60/CW)

1.1.1 Data sheet

Manufacturer: ANSELL

AERMLED3/60/CW Recessed luminaire COMMERCIAL - Endurance LED TPa UGR<19 600x600

Recessed Panel

AERMLED3/60/CW

COMMERCIAL

LED 32W - Cool White

Supplied c/w Remote Driver

- High performance maintenance free LED panel
- TPa as standard
- UGR<19 (unified glare rating) compliant luminaire assiating to elliminate glare for visual comfort
- panel outperforms 3x14W T5
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- Low glare and even light distribution for multiple applications
- Panel Pod Self-Test emergency option
- Panel Pod sensor option
- Surface mounting frame option
- Powered by Philips
- LED lifespan L80 B10 54,000 hours

IP44*

* Subject to ceiling/installation types

* Not applicable to surface/suspended applications

Options

/OCTO - OCTO Smart Control

/DD Digital Dimming (DD1/DD3)*

*DD2/DD4 available with alternative control gear

AIRMLED/SMF Surface Mounting Frame (L600mm x W600mm x D75mm)

AIRMLED/PRK Plasterboard Recessing Kit (Cut-out 615x615mm)

AERMLED/SK 2 Metre Suspension Kit

AEQTCC/600 Equaliser 600x600 Temperature Regulator

Operating Temp -20°C to 40°C

- Suitable for internal use only
- 5 Year Product Warranty
- IP44

Luminaire data

Absolute Photometry

Luminaire efficacy	: 104.13 lm/W
Classification	: A50 ↓100.0% ↑0.0%
CIE Flux Codes	: 64 88 97 100 100
UGR 4H 8H	: 17.6 / 17.6
Control gear	: Electronic ballast
Power	: 32 W
Luminous flux	: 3332 lm

Dimensions : 595 mm x 595 mm x 0.0 mm



Equipped with

Quantity	: 1
Designation	: LED
Colour	: 840/4000K
Socket	: --
Colour reproduction	: 1B/80...89

1 Luminaire data


1.1 ANSELL, COMMERCIAL - Endurance LE... (AERMLED3/60/CW)

1.1.1 Data sheet

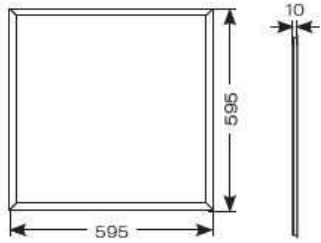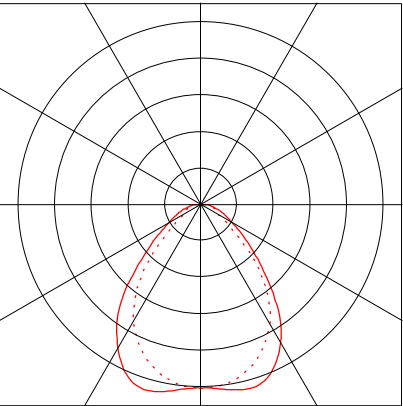

1.1 ANSELL, COMMERCIAL - Endurance LE... (AERMLED3/60/CW)

1.1.2 LDC

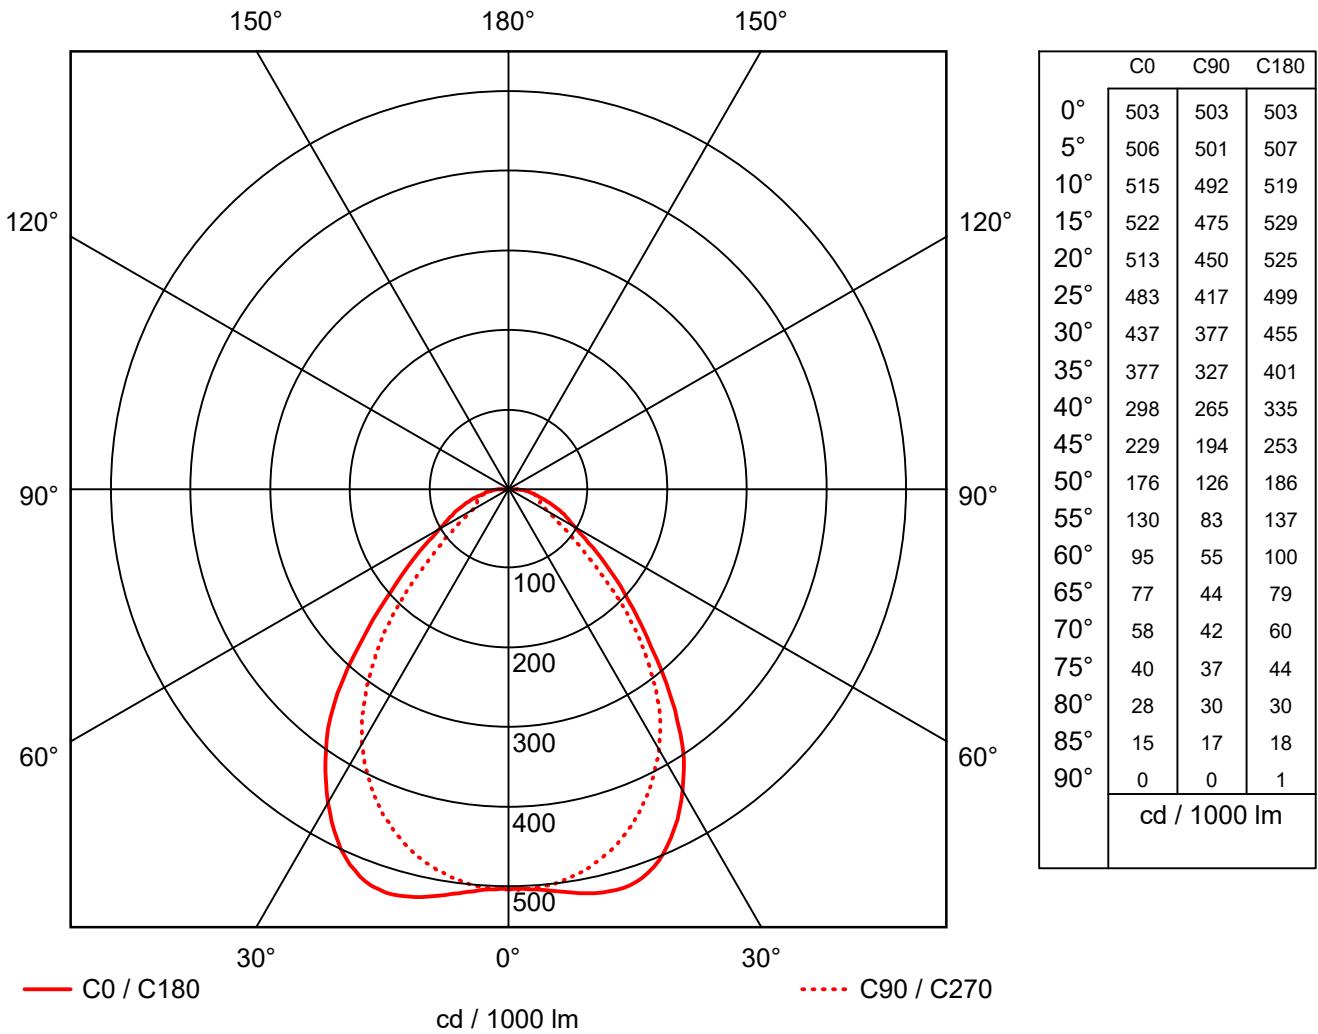

Manufacturer	: ANSELL	Luminaire efficacy	: 104.13 lm/W(A50)
Order number	: AERMLED3/60/CW	Light distribution	:
Luminaire name	: COMMERCIAL - Endurance LED TPa UGR<19 600x600 Recessed Panel	Beam Angle	: 42.2° C0 40.0° C90 44.2° C180 39.0° C270
Equipment	: 1 x LED 32 W / 3332 lm		
Dimensions	: L 595 mm x W 595 mm x H 0.0 mm		