



1 Luminaire data

1.1 ANSELL, COMMERCIAL - Endurance... (AERMLED3/HO/60/CW)

1.1.1 Data sheet

Manufacturer: ANSELL

AERMLED3/HO/60/CW Recessed luminaire COMMERCIAL - Endurance LED TPa UGR<19 High Output 600x600 Recessed Panel
AERMLED3/HO/60/CW
COMMERCIAL
LED 30W - Cool White

Supplied c/w Remote Driver

- High performance maintenance free LED panel
- TPa as standard
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- panel outperforms 3x14W T5
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- Low glare and even light distribution for multiple applications
- Panel Pod Self-Test emergency option
- Panel Pod sensor option
- Surface mounting frame option
- Powered by Philips
- LED lifespan L80 B10 54,000 hours

IP44*

* Subject to ceiling/installation types

* Not applicable to surface/suspended applications

Options

/OCTO - OCTO Smart Control

/DD Digital Dimming (DD1/DD3)*

*DD2/DD4 available with alternative control gear

AIRMLED/SMF Surface Mounting Frame (L600mm x W600mm x D75mm)

AIRMLED/PRK Plasterboard Recessing Kit (Cut-out 615x615mm)

AERMLED/SK 2 Metre Suspension Kit

AEQTCC/600 Equaliser 600x600 Temperature Regulator

Operating Temp -20°C to 40°C

- Suitable for internal use only
- 5 Year Product Warranty
- IP44

Luminaire data

Absolute Photometry

Luminaire efficacy : 124.87 lm/W
Classification : A50 ↓100.0% ↑0.0%
CIE Flux Codes : 65 89 98 100 100
UGR 4H 8H : 17.6 / 17.3
Control gear : Electronic ballast
Power : 30 W
Luminous flux : 3746 lm

Dimensions : 595 mm x 595 mm x 0.0 mm



Equipped with

Quantity : 1
Designation : LED
Colour : 840/4000K
Socket : --
Colour reproduction : 1B/80...89

1 Luminaire data

1.1 ANSELL, COMMERCIAL - Endurance... (AERMLED3/HO/60/CW)


1.1.1 Data sheet

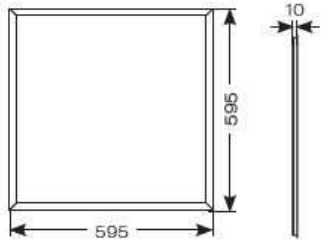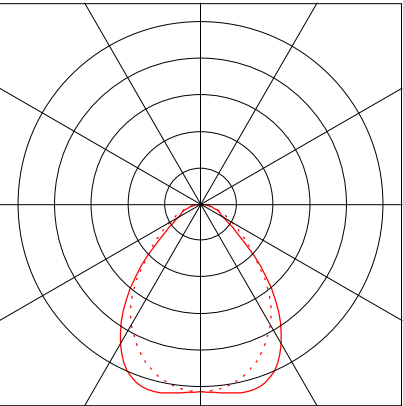



1.1 ANSELL, COMMERCIAL - Endurance... (AERMLED3/HO/60/CW)

1.1.2 LDC

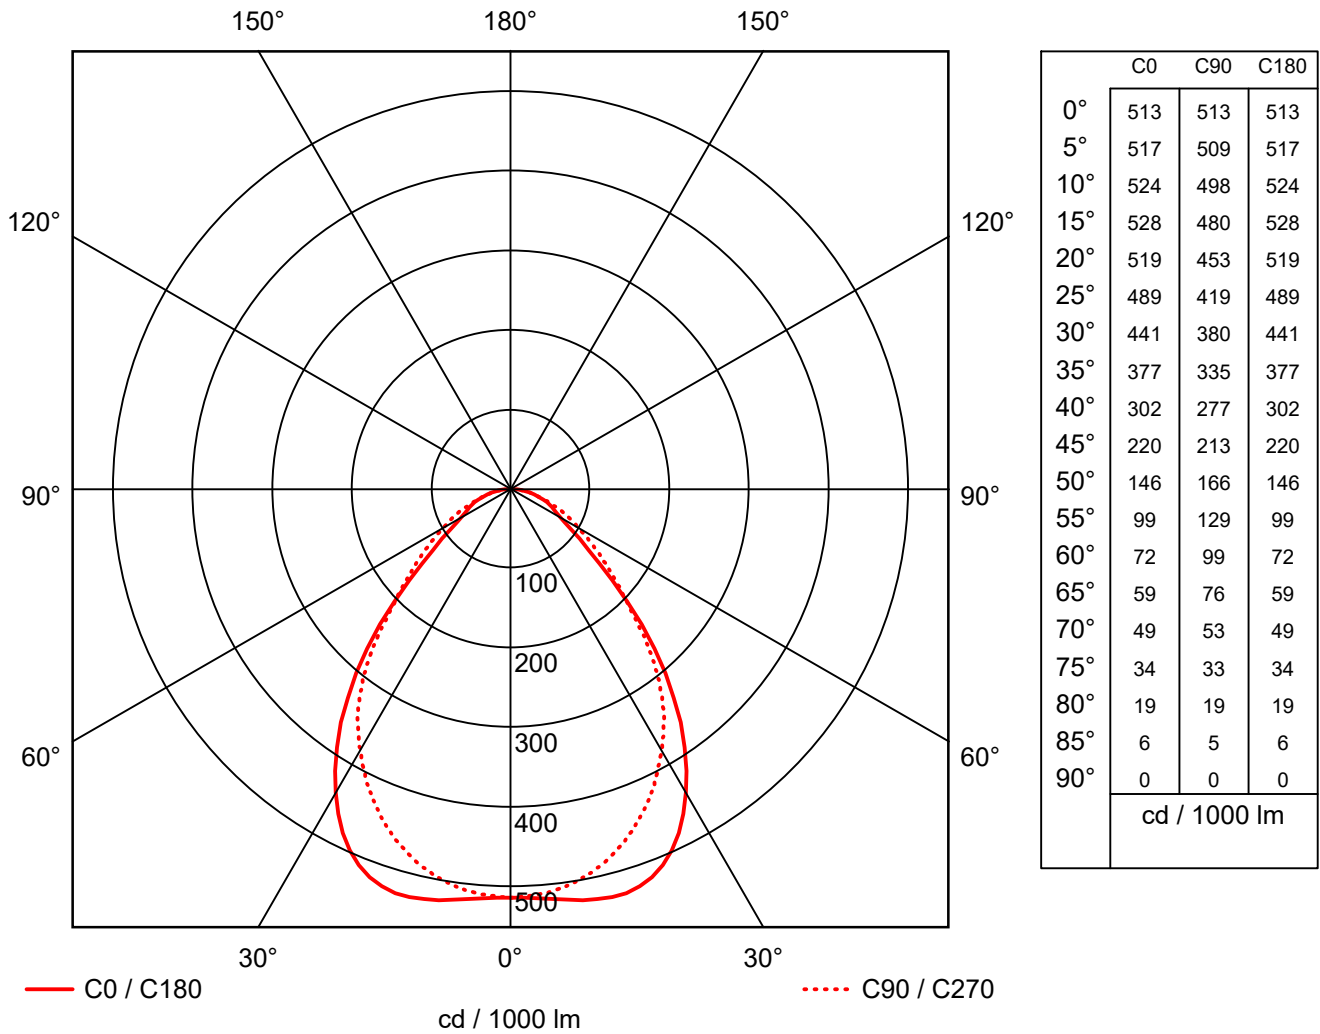

Manufacturer	: ANSELL	Luminaire efficacy	: 124.87 lm/W (A50)
Order number	: AERMLED3/HO/60/CW	Light distribution	: sym. to C0-C180 / C90-C270
Luminaire name	: COMMERCIAL - Endurance LED TPa UGR<19 High Output 600x600 Recessed Panel	Beam Angle	: 84.7° C0-C180 81.9° C90-C270
Equipment	: 1 x LED 30 W / 3746 lm		
Dimensions	: L 595 mm x W 595 mm x H 0.0 mm		