

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 Ansell Lighting, Sleek LED 110V Polycarbon... (ASLED/DIFF/RED)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

ASLED/DIFF/RED Sleek LED 110V Polycarbonate Bulkhead (Red Diffuser)


Luminaire data

Luminaire efficiency : 10.3%
Luminaire efficacy : 12.34 lm/W
Classification : A41 ↓94.4% ↑5.6%
CIE Flux Codes : 47 76 92 94 10
UGR 4H 8H : 13.0 / 14.0
Power : 5 W
Luminous flux : 61.7 lm

Equipped with

Quantity : 1
Designation :
Colour :
Luminous flux : 599 lm

Dimensions : 124 mm x 244 mm x 76 mm

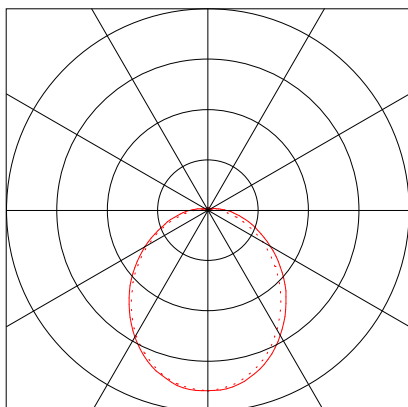


Object :
 Installation :
 Project number :
 Date :



1.1 Ansell Lighting, Sleek LED 110V Polycarbon... (ASLED/DIFF/RED)

1.1.2 LDC

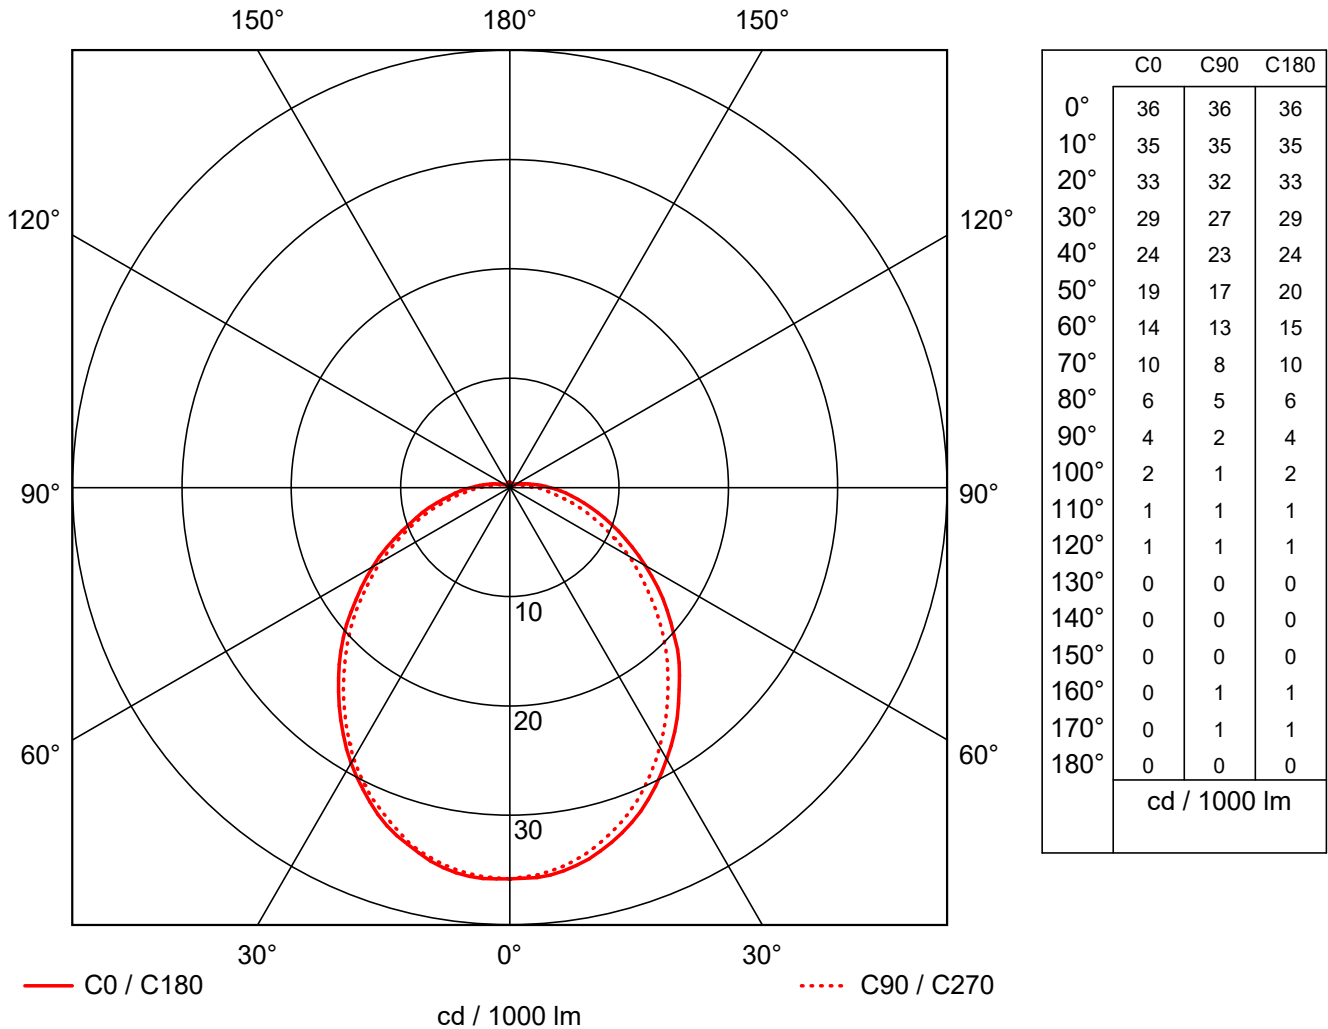

Manufacturer	: Ansell Lighting	Efficiency factor	: 10.3%
Order number	: ASLED/DIFF/RED	Luminaire efficacy	: 12.34 lm/W(A41)
Luminaire name	: Sleek LED 110V Polycarbonate Bulkhead (Red Diffuser)	Light distribution	:
Equipment	: 1 x 5 W / 599 lm	Beam Angle	: 52.7° C0
Dimensions	: L 124 mm x W 244 mm x H 76 mm		: 49.0° C90
File name	: rlx_20181121152612.ltd		: 53.1° C180
			: 51.5° C270