

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 ANSELL Lighting, Tornado 110V LED (ATORLED2X4/110V)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ATORLED2X4/110V

Tornado 110V LED


Luminaire data

Luminaire efficiency : 80%
Luminaire efficacy : 110.64 lm/W
Classification : A31 ↓94.0% ↑6.0%
CIE Flux Codes : 44 73 91 94 80
UGR 4H 8H : 22.5 / 21.8
Power : 40 W
Luminous flux : 4425.6 lm

Equipped with

Quantity : 1
Designation : 4000k
Colour :
Luminous flux : 5532 lm


Dimensions : 1270 mm x 113 mm x 80 mm

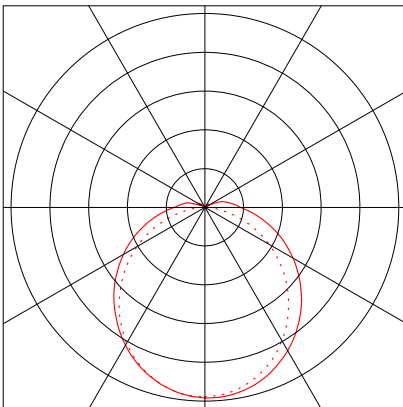

Object :
 Installation :
 Project number :
 Date :

1.1 ANSELL Lighting, Tornado 110V LED (ATORLED2X4/110V)

1.1.2 LDC

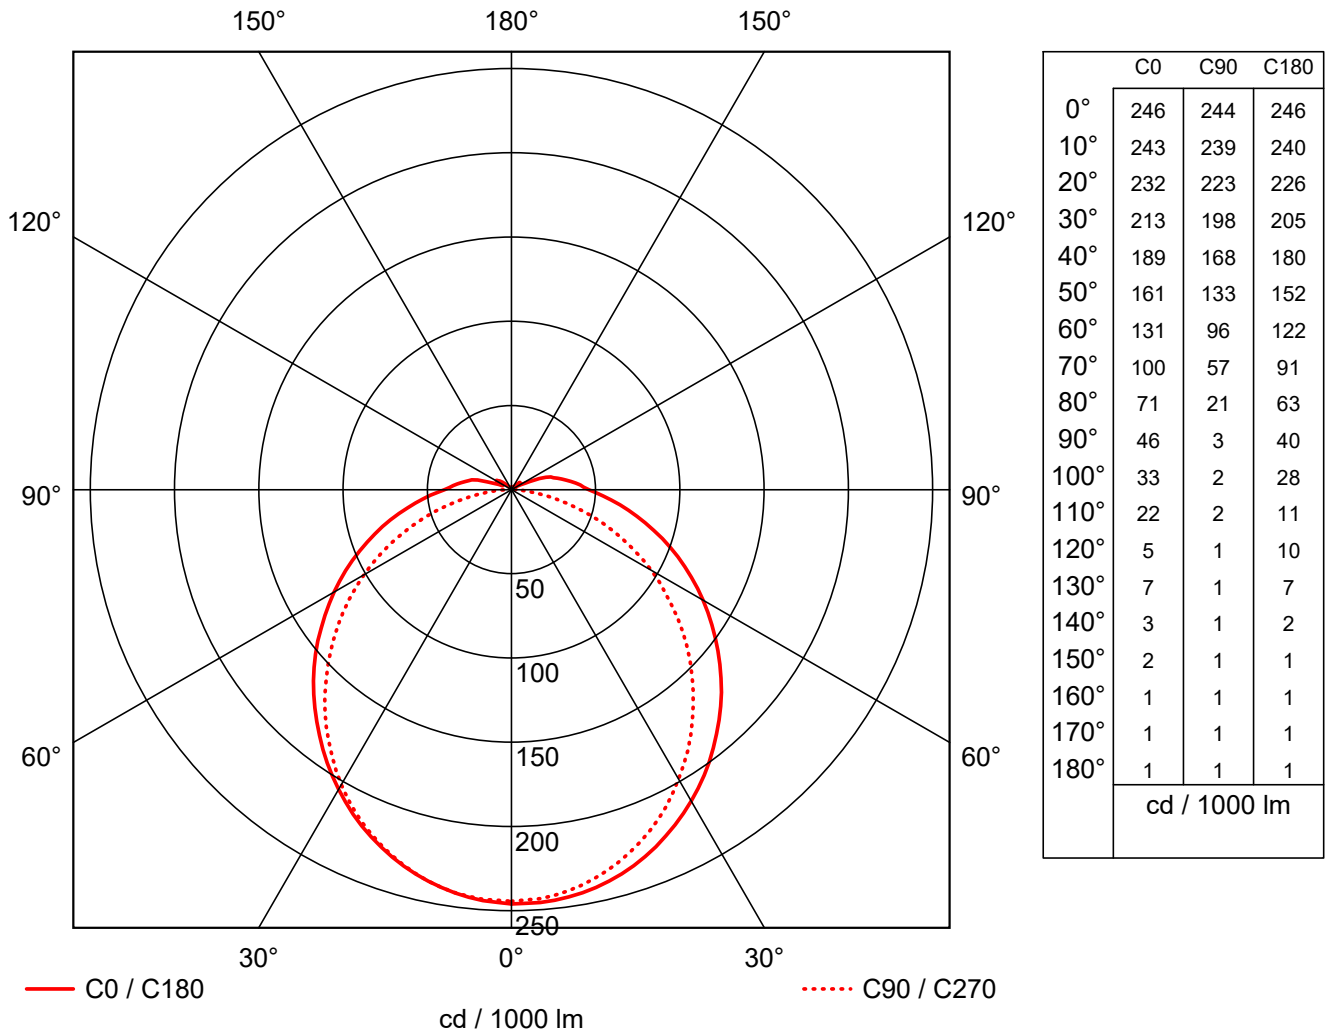

| | | | |
|----------------|----------------------------------|--------------------|---------------------|
| Manufacturer | : ANSELL Lighting | Efficiency factor | : 80% |
| Order number | : ATORLED2X4/110V | Luminaire efficacy | : 110.64 lm/W (A31) |
| Luminaire name | : Tornado 110V LED | Light distribution | |
| Equipment | : 1 x 4000k 40 W / 5532 lm | Beam Angle | : 62.5° C0 |
| Dimensions | : L 1270 mm x W 113 mm x H 80 mm | | 52.6° C90 |
| File name | : rlx_20180910070510.ltd | | 59.4° C180 |
| | | | 54.0° C270 |