

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 ANSELL Lighting, GU10 UPLIGHT + HALOPAR® 16 GU10 50W (AWO50)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AWO50 GU10 UPLIGHT + HALOPAR® 16 GU10 50W


Luminaire data

Luminaire efficiency : 100%
Luminaire efficacy : 10.73 lm/W
Classification : A70 ↓100.0% ↑0.0%
CIE Flux Codes : 80 96 99 100 100
UGR 4H 8H : 23.0 / 23.0
Power : 50 W
Luminous flux : 536.3 lm

Equipped with

Quantity : 1
Designation : OSRAM
HALOPAR® 30
Aluminium 50
Colour : 3000
Luminous flux : 536.3 lm
Colour reproduction : 100


Dimensions : Ø85 mm x 5 mm

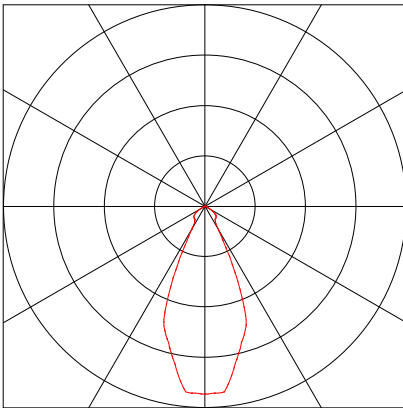

Object :
 Installation :
 Project number :
 Date :

1.1 ANSELL Lighting, GU10 UPLIGHT + HALOPAR® 16 GU10 50W (AWO50)

1.1.2 LDC

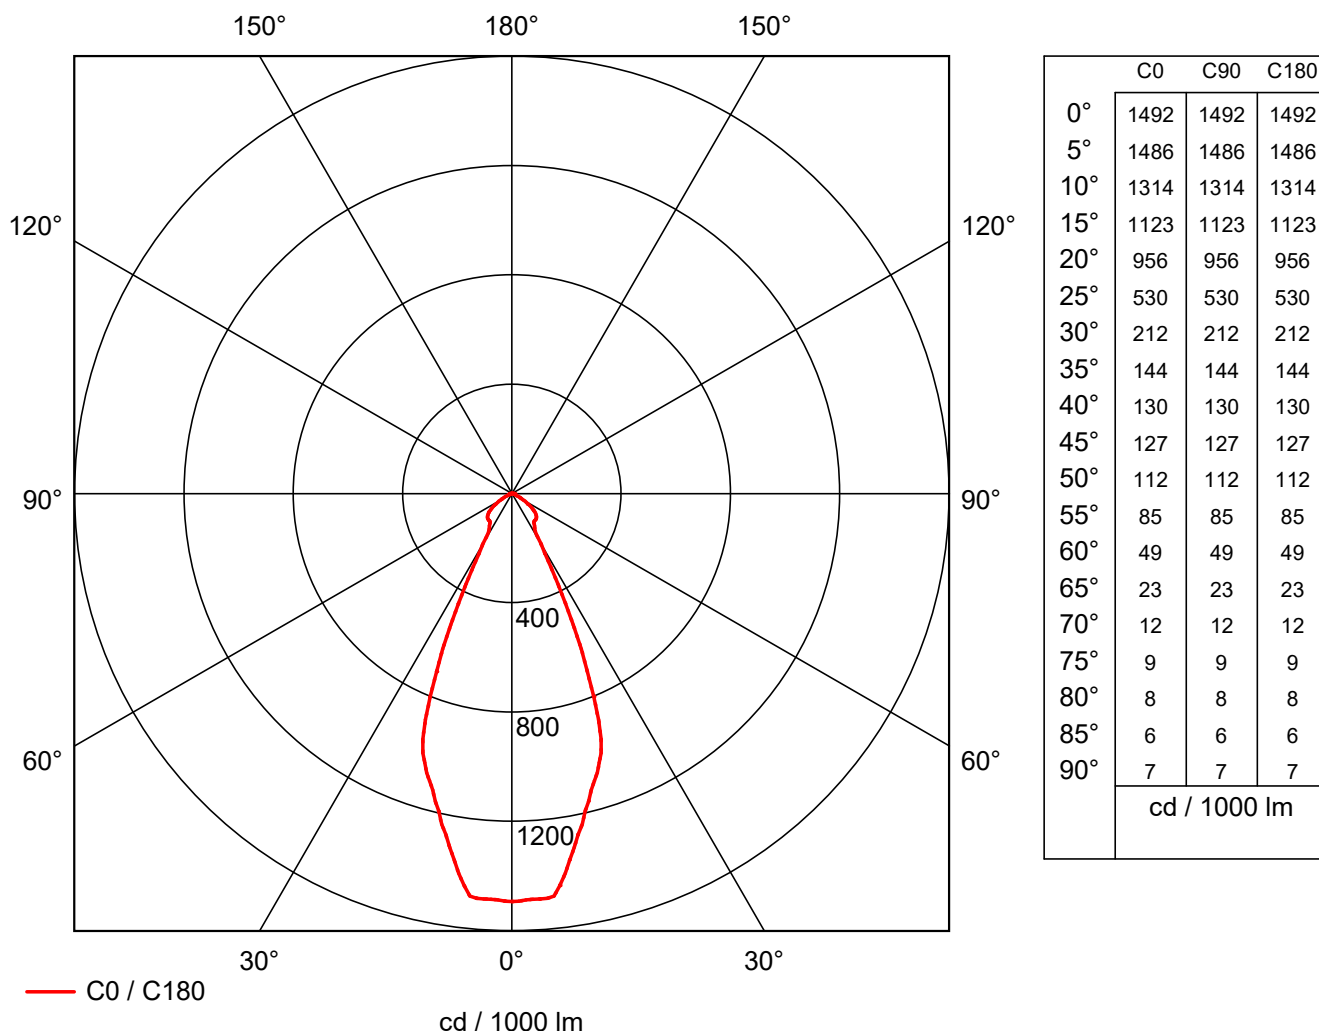

| | | | |
|----------------|--|--------------------|--------------------------|
| Manufacturer | : ANSELL Lighting | Efficiency factor | : 100% |
| Order number | : AWO50 | Luminaire efficacy | : 10.73 lm/W (A70) |
| Luminaire name | : GU10 UPLIGHT + HALOPAR® 16 GU10 50W | Light distribution | : rotationally symmetric |
| | | Beam Angle | : 45.2° C0-C180 |
| Equipment | : 1 x OSRAM HALOPAR® 30 Aluminu | | |
| Dimensions | : D 85 mm x H 5 mm | | |
| File name | : AWO50.ltd | | |