

1 Luminaire data

1.1 Ansell Lighting, Matala CCT LED (AMATROLED)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

AMATROLED Matala CCT LED


Luminaire data

Luminaire efficiency : 32.4%
Luminaire efficacy : 36.98 lm/W
Classification : A20 ↓100.0% ↑0.0%
CIE Flux Codes : 14 44 80 100 32
UGR 4H 8H : 17.9 / 32.6
Power : 7 W
Luminous flux : 258.9 lm

Dimensions : Ø190 mm x 55 mm


Equipped with

Quantity : 12
Designation : 3000K
Colour :
Luminous flux : 66.6 lm

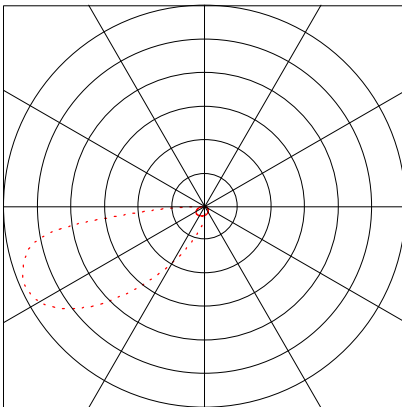

1.1 Ansell Lighting, Matala CCT LED (AMATROLED)

1.1.2 LDC

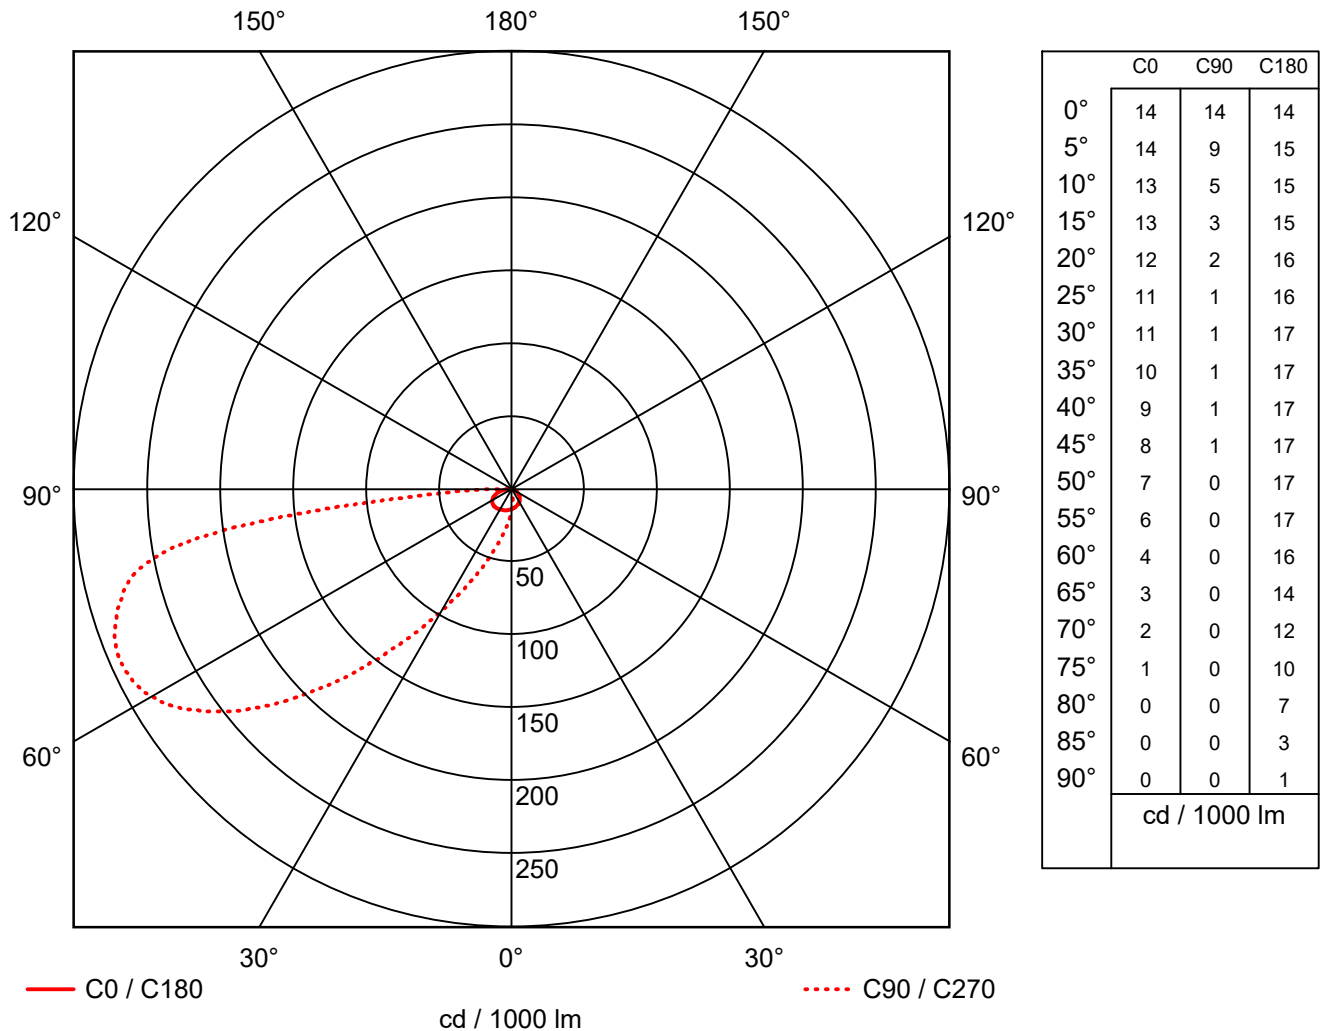

Manufacturer : Ansell Lighting
Order number : AMATROLED

Efficiency factor : 32.4%
Luminaire efficacy : 36.98 lm/W(A20)
Light distribution :
Beam Angle : -- C0
-- C90
-- C180
83.4° C270