



1 Luminaire data

1.1 Ansell Lighting, Matala CCT LED (AMATROLED)

1.1.1 Data sheet

Manufacturer: Ansell Lighting

AMATROLED Matala CCT LED


Luminaire data

Luminaire efficiency : 35.2%
Luminaire efficacy : 42.49 lm/W
Classification : A20 ↓100.0% ↑0.0%
CIE Flux Codes : 19 52 87 100 35
UGR 4H 8H : 18.9 / 31.8
Power : 7 W
Luminous flux : 297.4 lm

Equipped with


Quantity : 12
Designation : 4000K
Colour :
Luminous flux : 70.4 lm

Dimensions : Ø190 mm x 55 mm

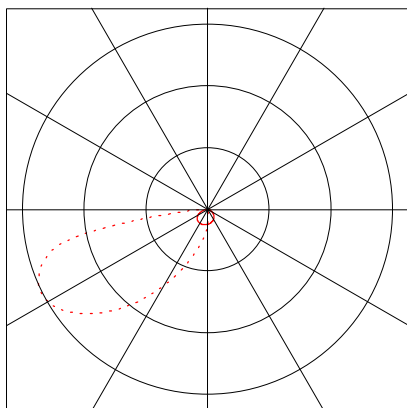

1.1 Ansell Lighting, Matala CCT LED (AMATROLED)

1.1.2 LDC

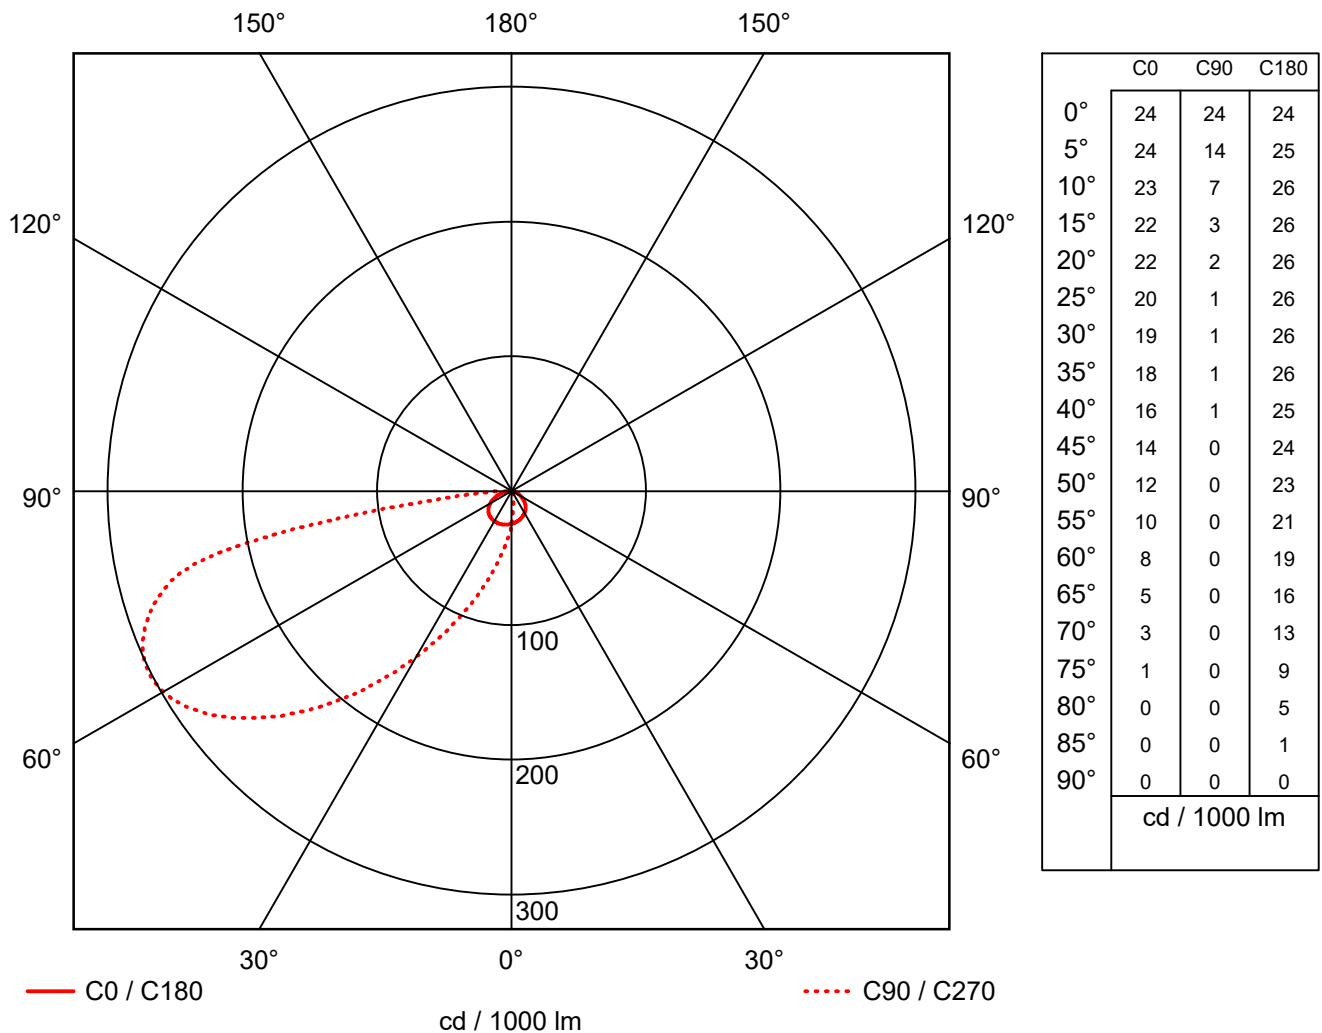

Manufacturer : Ansell Lighting
Order number : AMATROLED

Efficiency factor : 35.2%
Luminaire efficacy : 42.49 lm/W A20)
Light distribution :
Beam Angle : -- C0
-- C90
-- C180
80.4° C270