NOBILE
Italia

BRIK - BA10/2A

WALL BI-EMISSION

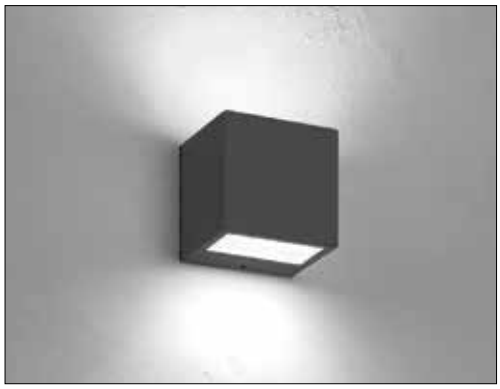





For further information please visit www.nobile.it/en/

SPECIFICATION TEXT

Square outdoor LED luminaire for wall-mounted installation. Triac dimmable LED. Bi-emission lighting, 80°x60° light beam. Die-cast aluminium body, copper free, painted white (RAL9003), grey (RAL9006), anthracite (RAL7016) or dark brown. Transparent glass with micro-prismatic diffuser. IK06. IP65. Wall base including plug and play terminal block. Stainless steel screws. Reduced dimensions: length 100mm, depth 75mm, height 100mm. 220-240V dimmable LED board.

Mounting	Product type	**Outdoor wall-mounted luminaire**			
	Installation type	**Wall-mounted**			
Dimension	Body	**100x100mm**			
	Width	**75mm**			
Lamp	LED	**SAMSUNG**			
	System/W	**2x9W**			
	Luminous flux nominal	**BA10/2A/3K/_**	2x1055lm	**BA10/2A/4K/_**	2x1150lm
	Luminous flux real	**BA10/2A/3K/_**	2x770lm	**BA10/2A/4K/_**	2x840lm
	Colour temperature CCT	**3000K, 4000K**			
	Colour rendering index CRI	**>80**			
	LED Lifetime	**36.000 h**			
Light	Light distribution	**Direct bi-emission**			
	Light beam	**80x60°**			
Material	Body	**Die-cast aluminium body, copper free**			
	Colour	**A= anthracite RAL7016, G= grey RAL9006, W= white RAL9003, BR= dark brown**			
	Diffuser	**Transparent glass with micro-prismatic diffuser**			
	Screws	**Steel**			
IK	IK	**06**			
Electrical	Operating voltage	**220-240V 50-60Hz dimmable LED board**			
Warranty	Warranty	**3 years**			
Norms	Norm compliance	**EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015**			

CODE CONFIGURATION

BA10	**/**	**2A**	**/**	*	*	**/**	*
					1		**2**
1	Colour temperature	**3K** = 3000K; **4K** = 4000K.					
2	Colour	**A**= anthracite; **G**= grey; **W**= white; **BR**= dark brown					

Nobile Italia S.p.A.
Viale Alexandre Gustave Eiffel, 100 Commercity Isola P.21-24 - 00148 Roma, Italia - Tel. +39 06 65002524 - info@nobile.it
Export Sales Department: Via Lavoratori Autobianchi, 1 20832 Desio (MB), Italia - Tel. +39 0362 1790030 - export.dpt@nobile.it