

Installation Sheet


IMPORTANT INFORMATION

- It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to the current IEE wiring regulations.
- These instructions should be read carefully and retained after installation for future reference and maintenance.
- Do not install this product on newly plastered surfaces.
- The LEDs in this wall light are not replaceable.
- Ensure all electrical connections are secure & that there are no loose strands.
- Clean this fitting with a soft damp cloth. Do not use any chemical or abrasive cleaners.
- This wall light is not dimmable.

PRODUCT SPECIFICATION

Electrical Classification: Class I
 Voltage: 240V / 50Hz
 Ingress Protection: IP54
 Rated Wattage: 2x5W
 Colour Temp.: 4000K
 Lumens: 700lm
 Lumens/Watt: 70lm/W

DIMENSIONS


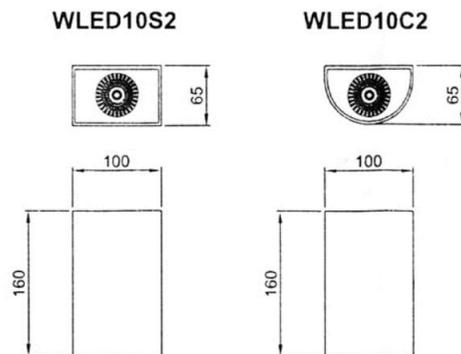


GUARANTEE

This product is guaranteed for a period of 2 years from the date of purchase. The guarantee is invalid in the case of improper use, improper installations or tampering. Should the product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. The provider is not responsible for any costs associated with the replacement of this product.

PART CODE: WLED10S2 / WLED10C2
 DESCRIPTION: 2x5W LED Up/Down Wall Spots
 FINISH: Dark Grey

APPROVALS & CLASSIFICATIONS



Always switch off the mains supply before Installation or Servicing.

SUGGESTED METHOD OF INSTALLATION

Read Instructions and check you have all the tools and accessories to complete the installation correctly. Choose the desired position for your wall spot, before making any fixing holes check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

STEP 1

Isolate the mains power supply before making any electrical connections.

STEP 2

a) Remove the fixing bracket screws from both sides of the housing body and remove bracket. b) Remove the 4 fixing screws securing the back plate in position and remove the back plate.

STEP 3

Position and secure the fixing bracket to a suitable solid surface, ensuring that the orientation is correct and using the fixings supplied.

STEP 4

Feed mains cable through the grommet in the housing back plate.

STEP 5

Terminate the mains cable into the 3-way terminal block in the housing, ensuring that the correct polarity is observed.

STEP 6

Re-fit the back plate of the wall spot body and replace the 4 fixing screws.

STEP 7


a) Locate housing body onto fixing bracket and secure in place with fixing screws removed in Step 2. b) Restore the mains power supply, switch on and test for satisfactory operation.



This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.



CLASS I WIRING DETAILS

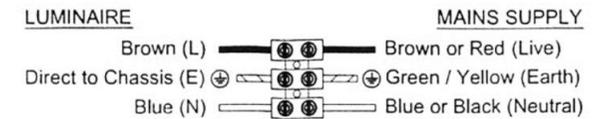

THIS IS A CLASS I PRODUCT AND MUST BE EARTHED

