

Safety Information


- > Before installing the LED Panel Z Bracket or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.
- > The brackets are suitable for some but not all metal pan ceilings. We suggest ordering a sample to test it on your exact ceiling make and model.
- > Make sure that you have all the tools and equipment to complete the installation safely and correctly.
- > Improper installation could cause harm to your property and/or person and void your warranty.
- > It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.
- > Identify installation location & check for any passing wiring/piping prior to drilling and installing cables.
- > Ensure chosen surface is of sufficient strength/thickness to withstand the weight of LED fitting installation.

Environment

- > Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.



PRODUCT DIMENSIONS

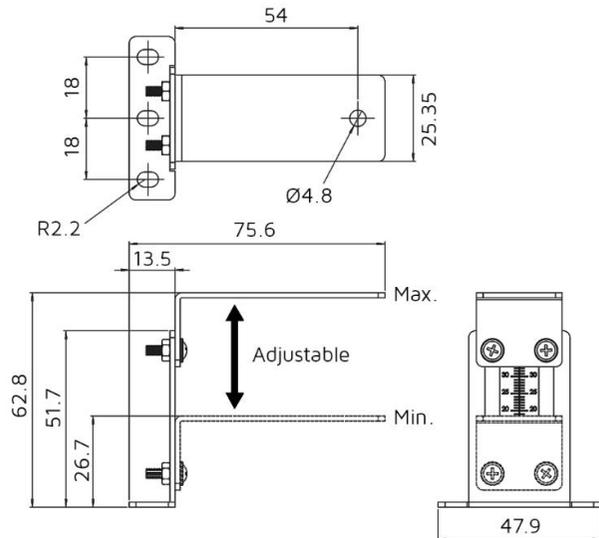

All units are in mm

Important Warranty Information

The LED Panel Z Brackets have a 3 year warranty. The registrant must provide the part number and date of manufacture, which can be found on the label attached to the product packaging, along with the original invoice.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting
Buckingham Business Park
300 Anderson Road
Cambridge
CB24 4UQ
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk
www.netled.co.uk/downloads

Distributed by



Z BRACKET FOR BURGESS / SS CEILING INSTALLATION GUIDE


Part Number	Description
NET-39-16-05	Panel Z Brackets for Burgess/SS Ceilings




Installation procedure: Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain the leaflet for future reference. Important: When installing, leave a space of at least 1.2m between the LED Panel and any heating source/air conditioning unit.

LED Panel Z Bracket Installation:


Step 1: Unpackage the Z Brackets and ensure that all components below are included:

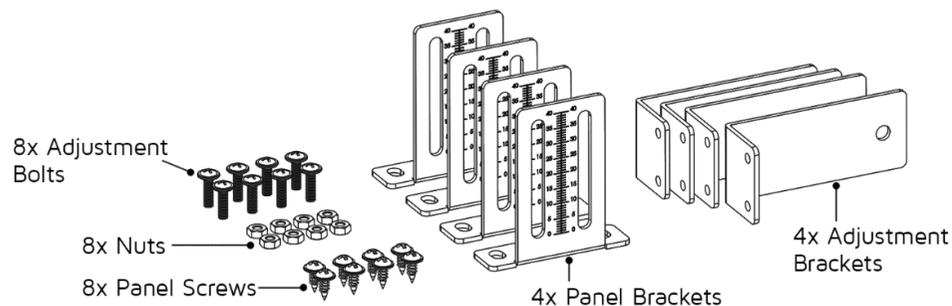


Step 2: Assemble the Z Bracket as per Fig.1 shown below. Adjust the height of the bracket according to the thickness of the ceiling. Ensure that all 4x brackets are set to the same height measurement.

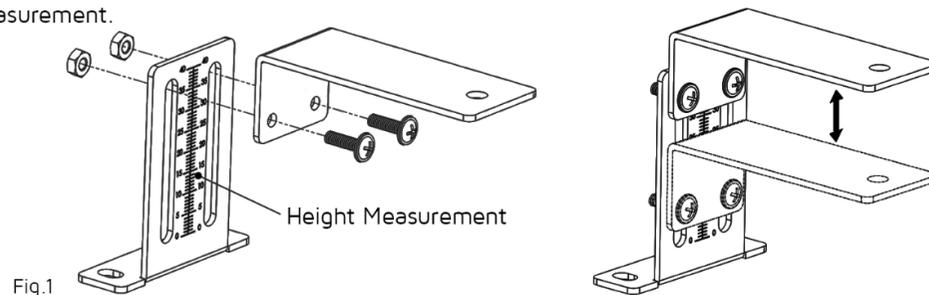


Step 3: Remove the 2x Panel screws in each corner of the LED Panel. Align the Bracket with the panel holes, then insert the 2x panel screws to secure the bracket.

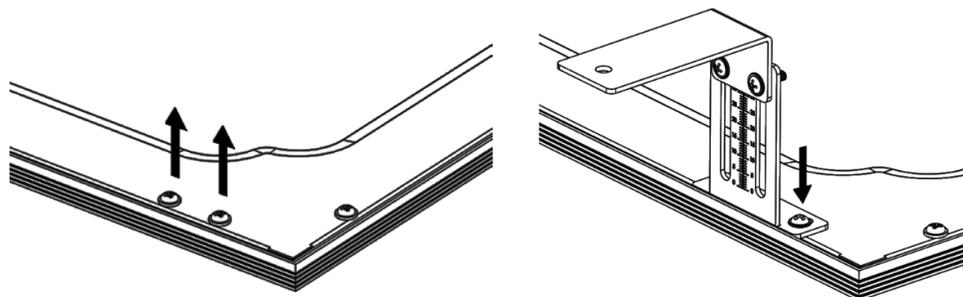

Step 4: Repeat this process on all corners of the LED panel.

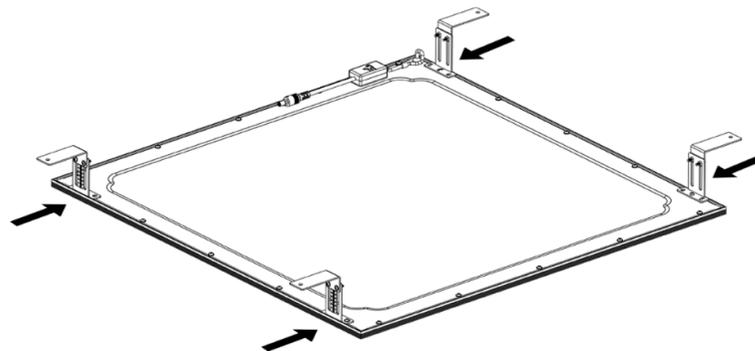

Step 5: Connect the LED Driver and attach the panel to the ceiling frame.

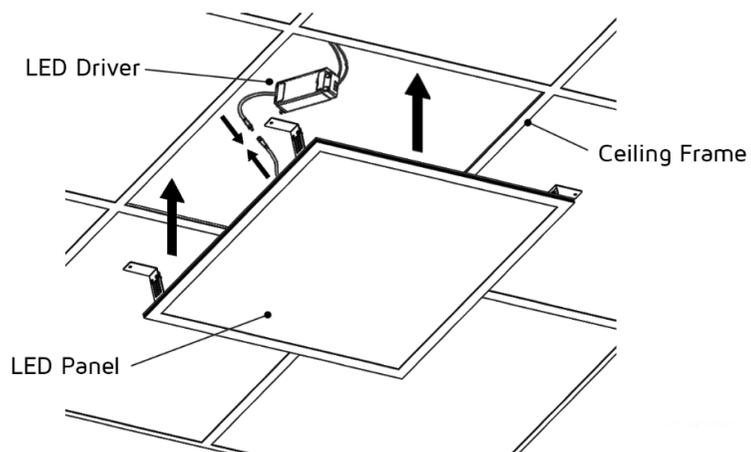

Step 6: Installation is complete. Turn the power on and ensure the LED panel functions as intended.

