

LED Lamp Specification	E08VN23AC	E08VN30AC
Luminaire lumens	9W - 1100 lm 12W - 1433 lm 15W - 1774 lm	14W - 1774 lm 18W - 2248 lm 22W - 2642 lm
Colour temperature	3000K / 4000K / 6000K	
Nominal Lifetime of the lamp	50,000	
Number of switching cycles before premature failure	25,000	
Warm-up time up to 60% of the full light output	Instant	
Dimmable	No	
Nominal Beam angle	120°	
Displacement factor	0.9	
Lumen Maintenance factor at the end of nominal life	0.7	
Colour rendering	80	
Colour consistency	< 6	
Rated peak intensity	595cd - 920cd	
Voltage / Frequency	220 - 240V~ 50Hz	
Lumen efficacy	120lm/W - 127lm/W	
This product contains a light source of energy efficiency class D		
Not suitable for accent lighting		

eterna.

INSTALLATION INSTRUCTIONS





Scan QR code to go to web page

Vinko

E08VN23AC
E08VN30AC

Power CCT Switchable IP40 235mm Surface Mount Downlight
Power CCT Switchable IP40 300mm Surface Mount Downlight

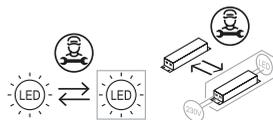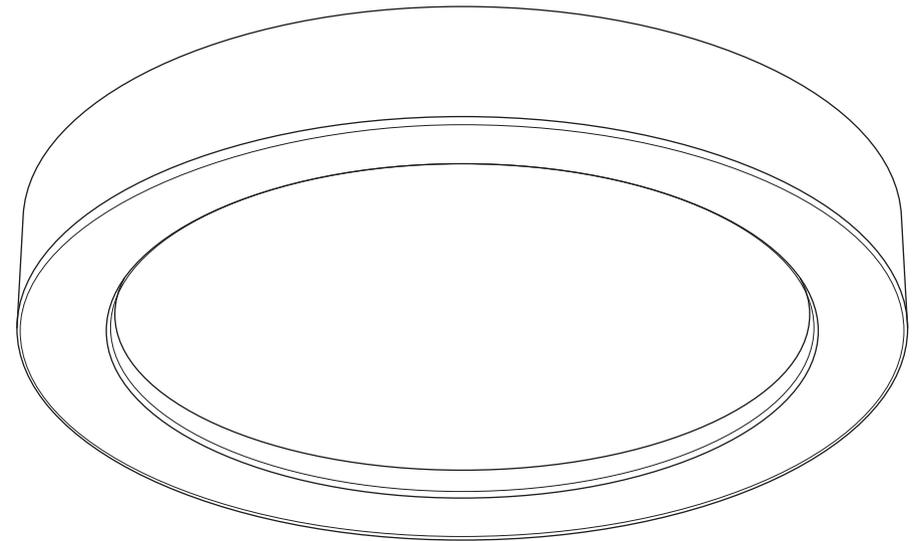

Issue 1225

Pack contents: 1 x LED fitting

A guide for qualified electricians

Made in China

Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk
Visit our website: www.eterna-lighting.co.uk

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard. Using this fitting in an environment where there are prolonged periods of use or higher than normal ambient temperatures may result in a shortened working life.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

Make sure that the fixings are strong enough to support the weight of the fitting and hold it securely.

When working at heights ensure you use a suitable platform.

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations. If in doubt, consult a qualified electrician.

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist - do not dispose with household waste.

CLEANING:

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

