
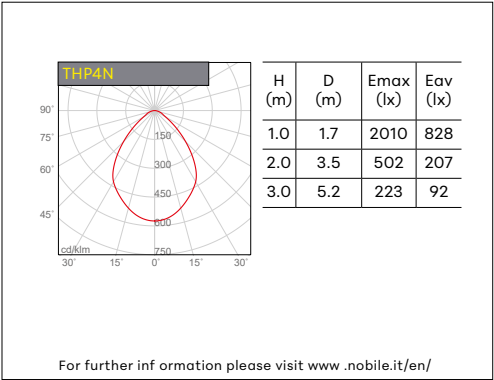


THEA PRO - THP4N

ROUND RECESSED FIXED WITH FRAME

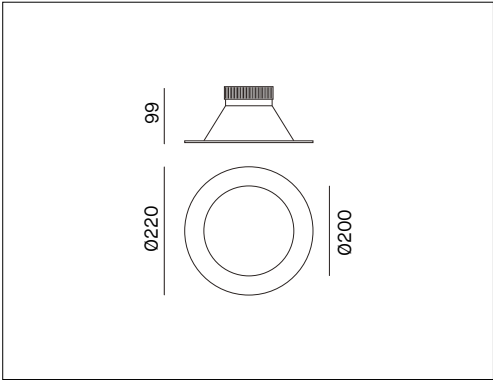

SPECIFICATION TEXT


Round recessed LED luminaire with diffuse emission. Die-cast aluminium body and frame in white polycarbonate RAL9003. Efficient flow and controlled luminance UGR<19 0.50H with accessory THP34UGR. IP20/IP65. Power supply included. Dimmable versions and remote control options available.

Mounting	Product type	Recessed fixed downlight	
	Installation type	Ceiling	
Dimension	Diameter	220mm	
	Height	99mm	
	Cut out	200mm	
	Minimum recessed depth	125mm	
	Plasterboard depth	min. 1mm max. 25mm	
Lamp	LED	SMD 2835	
	System/W	25W	
	Luminous flux nominal	THP4N	4600lm
	Luminous flux real	THP4N	3500lm
	Colour temperature CCT	4000K	
	Colour rendering index CRI	>80	
	LED Lifetime	80.000 h L80 (Ta 25°)	
	MacAdam	3	
	UGR	<28 (with accessory THP34UGR UGR<19 0.50H)	
Light	Light distribution	Direct	
	Light beam	80°	
Material	Body	Die-cast aluminium	
	Frame	White polycarbonate RAL9003	
	Reflector	Chrome polycarbonate	
Electrical	Driver	ON-OFF 220-240V 50-60Hz included	
	LED current	650mA	
Warranty	Warranty	5 years	
Norms	Norm compliance	EN60598-1, EN60598-2-2, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015	

THP4N	/	*	*
1	Driver	1	


1 = On-Off Made in Italy; 2* = PUSH/1-10V Made in Italy; 3 = DALI Made in Italy; 8 = DALI/PUSH; 9 = Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included); 10 = Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android); 11 = Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)

*(Max 4 devices PUSH button)

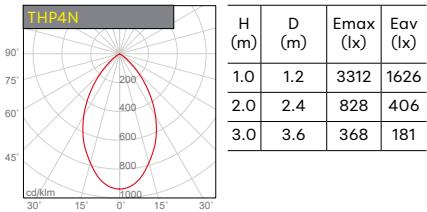

Accessory available upon request

THP34UGR CHROME POLYCARBONATE REFLECTOR FOR UGR



Emergency kit available upon request

KIT/EMERGENZA/3H	Emergency kit for LED up to 3 hours
------------------	-------------------------------------