

Installation Instructions

Instrucciones de instalación, Instructions d'installation, Installationsanleitung, إرشادات التركيب,

Installatie-instructies, Instruções de instalação, Installatie-instructies,


設置手順説明, Οδηγίες εγκατάστασης



Product Code: [ADDIM/1/36/MC]




Master
Translations
QR Link




1

PUSH DIMMING

PARALLEL

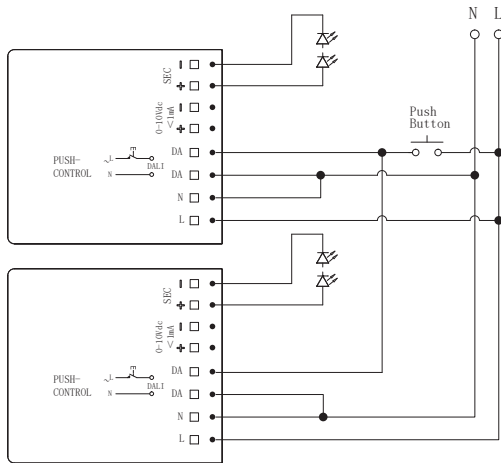


SERIES

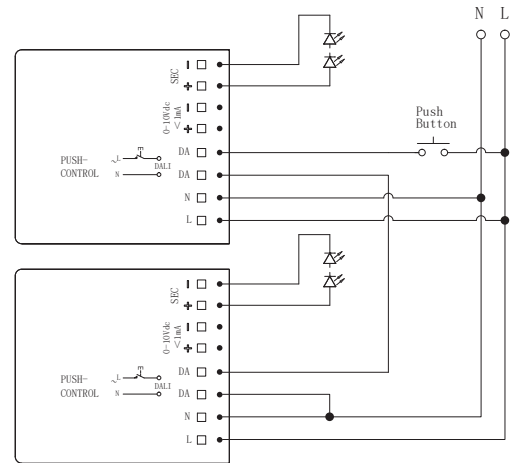

2

DALI DIMMING

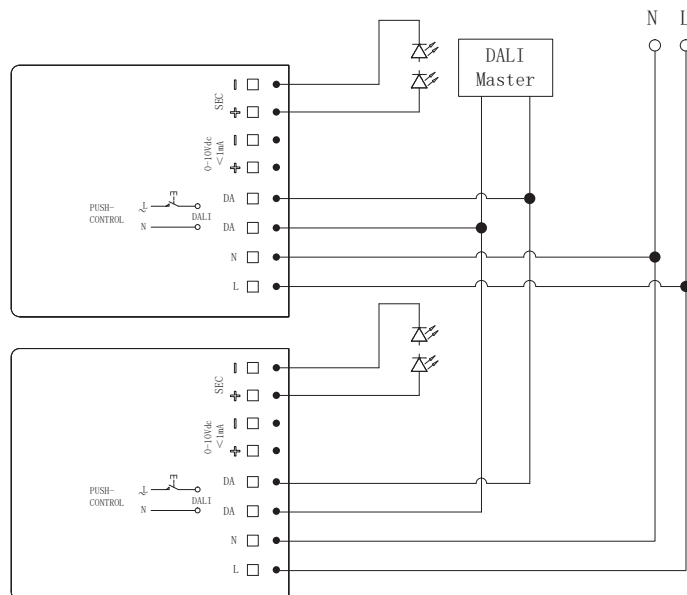

Ansell Electrical Products
Unit 6B, Stonecross Industrial
Park,
Yew Tree Way,
Warrington,
WA3 3JD


Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Ballymount
Dublin 12,
D12 TH56

www.ansell-lighting.com

3

0-10V DIMMING

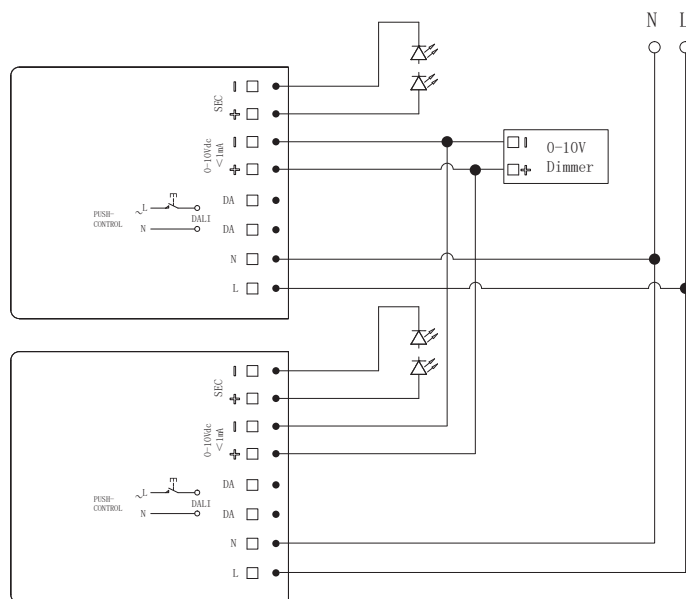

4

SPECIFICATIONS

Code	ADDIM/1/36/MC					
Rated Voltage	220-240V AC, 50/60Hz					
Rated Current	0.19A Max.					
Rated Power	36W Max.					
Power Factor	≥ 0.95					
Stand-by Power	≤ 0.5W (@230Vac when DALI turn off)					
Control Method	DALI Dimming/PUSH Dimming/0-10V Dimming					
Output	500mA	9-58Vdc	4.5-29.0W;	850mA	9-42Vdc	7.7-35.7W;
	550mA	9-58Vdc	5.0-31.9W;	900mA	9-40Vdc	8.1-36.0W;
	600mA	9-58Vdc	5.4-34.8W;	950mA	9-38Vdc	8.6-36.1W;
	650mA	9-55Vdc	5.9-35.8W;	1000mA	9-36Vdc	9.0-36.0W;
	700mA	9-51Vdc	6.3-35.7W;	1050mA	9-34Vdc	9.5-35.7W;
	750mA	9-48Vdc	6.8-36.0W;	1100mA	9-33Vdc	9.9-36.3W;
	800mA	9-45Vdc	7.2-36.0W;			
Output Over Temperature Protection	Yes, without self recovery function(Can be inquired)					
Output Short Circuit Protection	Yes, without self recovery function(Can be inquired)					
Emc Standard	EN55015, EN61547, EN61000-3-2, EN61000-3-3					
DALI Protocol Standard	IEC62386-101 / 102 / 207 DT6 / 220 DT19 / 251 / 252 / 253					
Safety Standard	EN61347-1, EN61347-2-13					
Certification	CE					
Operating Temperature	-25℃~50℃ Humidity: 85% (Non-condensing)					
Storage Temperature	-40℃~80℃, Humidity: 85% (Non-condensing)					
Dimension	154*63*28mm					
IP Rating	IP20					
Warranty	5 years @Ta full load					



Output Current Setting				
mA	1	2	3	4
500	-	-	-	-
550	-	ON	-	-
600	-	-	ON	-
650	-	ON	ON	-
700	ON	ON	ON	-
750	-	-	-	ON
800	ON	-	-	ON
850	-	ON	-	ON
900	ON	ON	-	ON
950	-	-	ON	ON
1000	ON	-	ON	ON
1050	-	ON	ON	ON
1100	ON	ON	ON	ON

Ansell Electrical Products
Unit 6B, Stonecross Industrial
Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Ballymount
Dublin 12,
D12 TH56

www.ansell-lighting.com